

Beer and Spare parts catalogue

Europe

 **VINSERVICE®**

 **TAPRITE®**

 **DSI®**




aalberts

dispense
technologies

Fall Multitap



Body:

- ABS and aluminium. Front satin aluminium plate

Medallions:

- 80 mm LED illuminated and 120 mm central LED illuminated

Ways/Faucets:

- 2,3,4

DIMENSIONS

Distance between the taps:
131 mm





Body:

- ABS and aluminium. Front satin aluminium plate

Medallions:

- 120 mm central LED illuminated

Ways/Faucets:

- 1

DIMENSIONS



Icefall



Body:

- ABS and aluminium

Medallions:

- New XL 120 mm front illuminated logo

Ways/Faucets:

- 1,2,3,4

Thermoelectric technology:

- 40% less energy than traditional glycol systems


WHY PELTIER?

No glycol cooler needed
Stable technology: less maintenance
Only 30 mins to build a perfect ice layer
Save up to 40% of energy
Less space required
Total control over the ice layer
It works in any environment
User friendly technology
SAVE SPACE & MONEY!

DIMENSIONS



DIMENSIONS

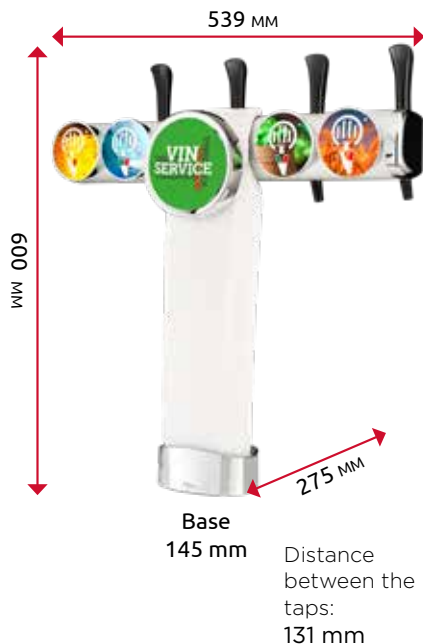



Body:

- Brass with chrome or painted finish.
- Upper plaque in aluminium.
- Base in ABS

Medallions:

- 80 mm LED illuminated logo and LED illuminated ring (different colours available).

Ways/Faucets:

- 1



Bloom Ice

- Concept, design and realization by Vin Service.
- 80% less energy than traditional glycol system.

Body:

- Iced plaque in aluminium
- Special iced surface featuring thermoelectric technology: no glycol cooler needed


DIMENSIONS



Flute



DIMENSIONS

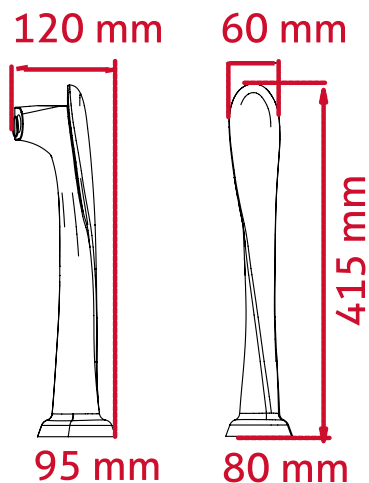

Body:

- Brass with chrome, gold, copper or painted finish

Medallions:

- Available with 80 or 120 mm LED illuminated medallions

Ways/Faucets:

- 1 or 2

Available with condensation or ice effect

Body:

- Brass with chrome, gold, copper or painted finish

Medallions:


- Available with 80 or 120 mm LED illuminated medallions

Ways/Faucets:

- 1 to 3

Available with condensation or ice effect

DIMENSIONS

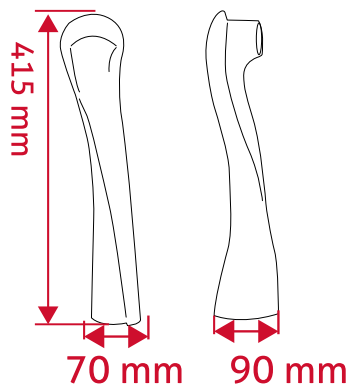

Lucky Menabrea

Double finish:

- Matte and polished brass
- Pad printed logo



Lucky Ichnusa

ABS pod with branded cold drawn aluminium plaque

Super Lucky

**Body:**

- Brass with chrome or painted finish

Medallions:

- Special front LED illuminated lens

Ways/Faucets:

- 1 or 2

Dimensions without tap

(Height x Width x Depth):

- 460 x 70 x 90 mm

MOQ 50 pcs.

Mini Lucky

**Body:**

- Brass with chrome or gold finish

Medallions:

- Available with 80 mm LED illuminated medallions

Ways/Faucets:

- 1, 2, 4

Dimensions without tap

(Height x Width x Depth):

- 300 x 70 x 90 mm

Body:

- Brass with chrome finish

Medallions:

- Available with 80 or 120 mm LED illuminated medallion


Ways/Faucets:

- 1

Available with condensation or ice effect

MOQ: 100 pcs.

DIMENSIONS

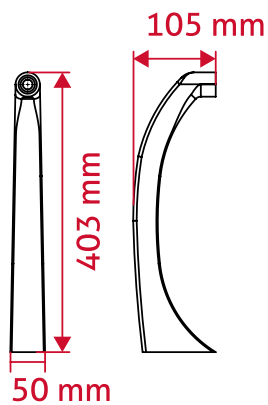

Maxi Panther

Body:

- Brass with chrome or gold finish

Medallions:


- Available with 80 or 120 mm LED illuminated medallion

Ways/Faucets:

- 3 or 4

Available with condensation or ice effect


DIMENSIONS

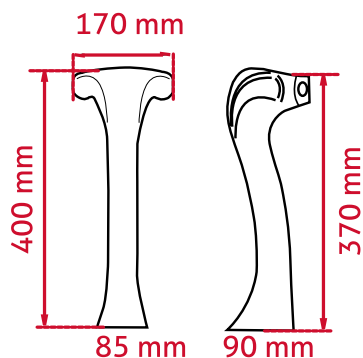

Shield



DIMENSIONS

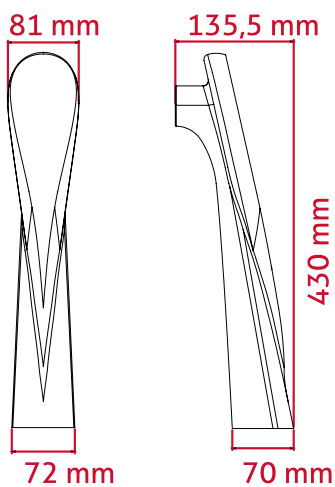

Body:

- Brass with chrome, gold, copper or painted finish
- Front LED illuminated plate

Medallions:

- Available with 80 or 120 mm LED illuminated medallions


Ways/Faucets:

- 1 to 3

Available with condensation or ice effect



DIMENSIONS

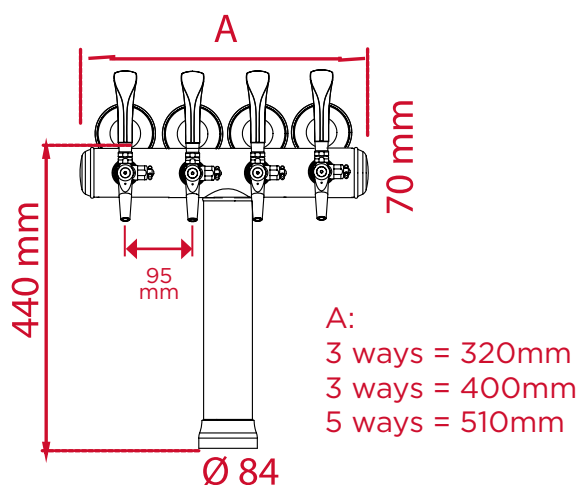

Body:

- Brass with chrome or copper finish

Medallions:

- 80 mm LED illuminated logos

Ways/Faucets:

- 3, 4 or 5



Sexy

Body:

- Brass with chrome or painted finish

Medallions:

- 80 or 120 mm LED illuminated medallions

Ways/Faucets:

- 1 to 4

Dimensions without tap

(Height x Width x Depth):

- 430 x 90 x 160 mm

Available with condensation or ice effect



Super Sexy Premium

Body:

- Brass with chrome or painted finish
- Front LED illuminated plate

Medallions:

- Upper 80 mm LED illuminated logo

Ways/Faucets:

- 1

Dimensions without tap

(Height x Width x Depth):

- 510 x 107 x 150 mm



Super Sexy

Body:

- Brass with chrome or painted finish
- Front LED illuminated plate

Ways/Faucets:

- 1 or 2

Dimensions without tap

(Height x Width x Depth):

- 410 x 100 x 210 mm

Spagna

Body:

- Brass with chrome, gold or copper finish

Medallions:

- LED illuminated logo with fish-eye effect

Ways/Faucets:

- 1

Dimensions without tap

(Height x Width x Depth):

- 485 x 105 x 100 mm
- Available with condensation or ice effect



Laser

Body:

- Polished stainless steel, also available with copper or painted finish.

Medallions:

- 80 or 120 mm LED illuminated medallions

Dimensions without tap

(Height x Width x Depth):

- 592 x 80 x 80 mm

Laser etched and illuminated brand on the body.



Industrial Bridge



Body:

- Polished stainless steel
- Diameter of the tube: 90 mm

Medallions:

- Available with 80 mm LED illuminated medallions
- Integrated front medallions

Ways/Faucets:



- 3 to 6 with a single body
- 8 ways for the two 4-body connected version
- 10 ways for the two 5-body connected version
- 12 ways for the two 6-body connected version

Extra:

- Satin finish or Copper finish

Remember to drill a hole for each leg of the tower in case you choose a 2-body solution

DIMENSIONS

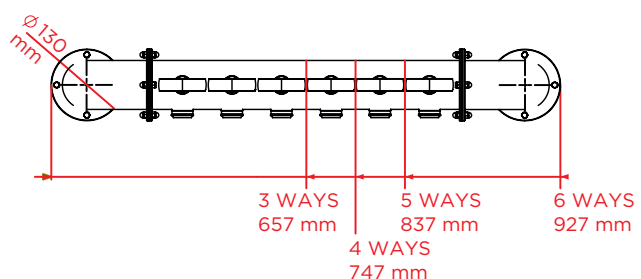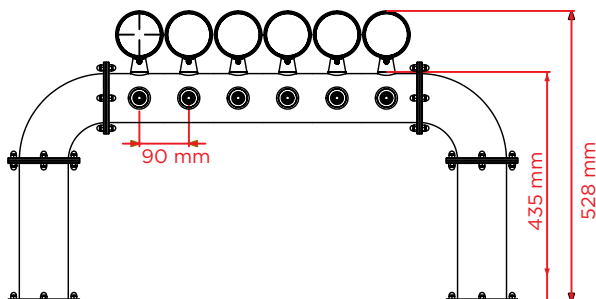

Industrial Flange

Body:

- Polished stainless steel
- Diameter of the tube: 90 mm

Medallions:


- Available with 80 or 120 mm LED illuminated medallions

Ways/Faucets:

- 1

Extra:

- Satin finish
- Copper finish
- Led back-lit brand on the body

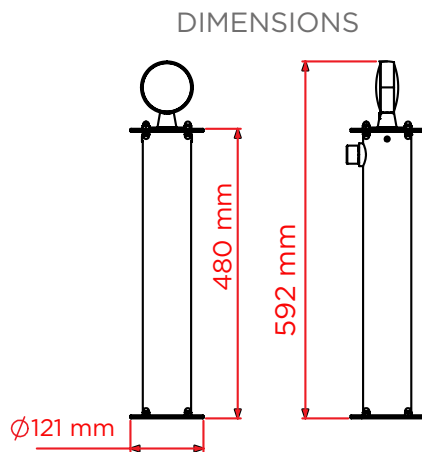

Industrial Swan

Body:


- Polished stainless steel
- Diameter of the tube: 90 mm

Ways/Faucets:


- 1 or 2

Extra:

- Satin finish
- Copper finish

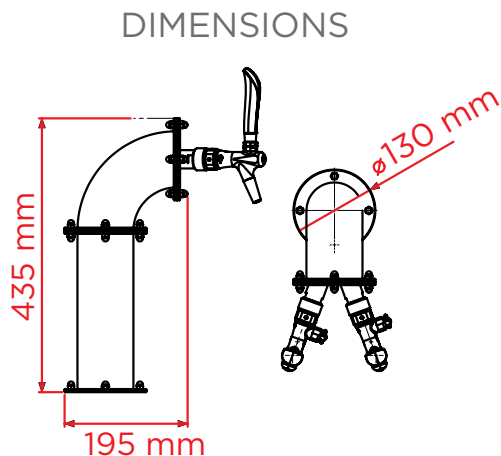

Industrial T

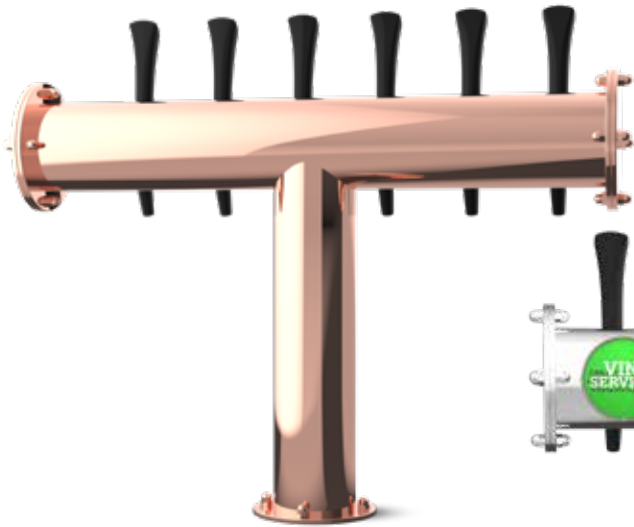

Body:

- Polished stainless steel
- Diameter of the tube: 90 mm

Medallions:

- Available with 80 mm LED illuminated medallions or with integrated front medallions

Ways/Faucets:




- 3, 4, 5, 6, 7

Extra:

- Satin finish or Copper finish



DIMENSIONS

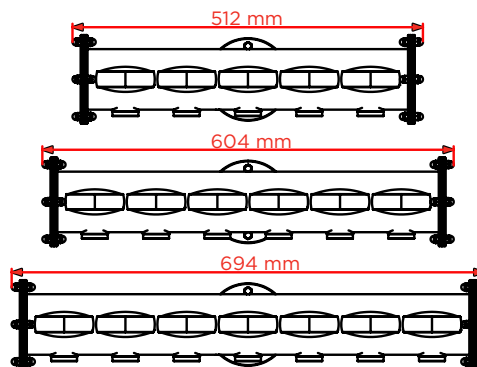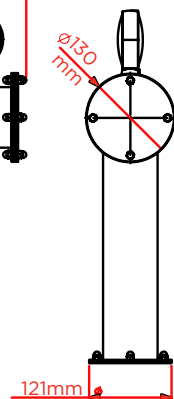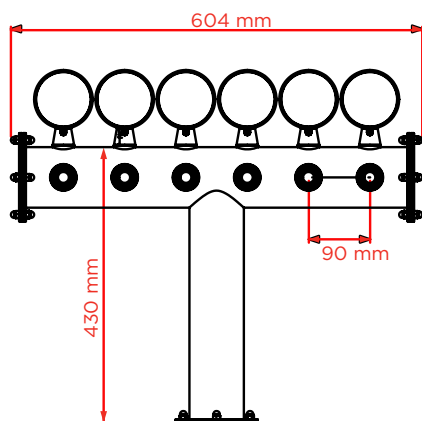



Body:

- Polished stainless steel
- Diameter of the tube: 90 mm
- Leftward and rightward towers available

Medallions:


- Available with 80 mm LED illuminated medallions or with integrated front medallions

Ways/Faucets:



- 2 to 6

Extra:

- Satin finish or varnished copper finish

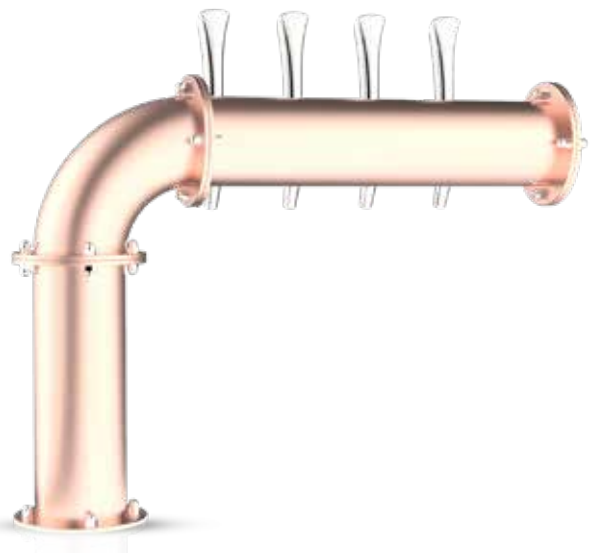

DIMENSIONS

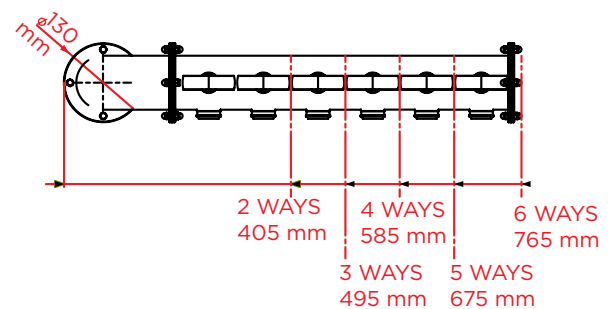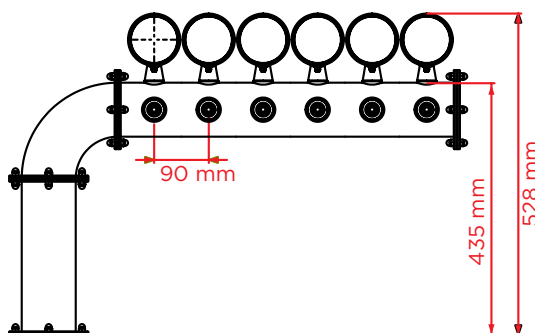

Fusion T



Side view

Body:

- Anodized extruded aluminium



Medallions:

- Available with 80 mm LED illuminated medallions

Ways:

- 4 - 8


DIMENSIONS

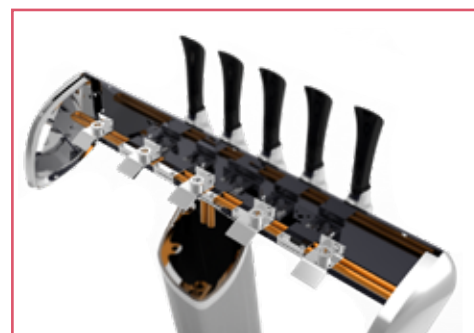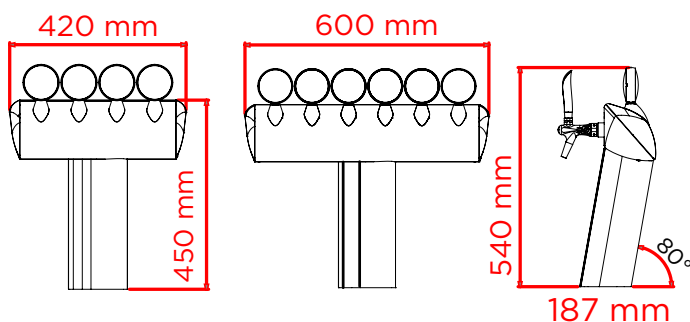

A.T.B Innovative
System for Improved cooling



DIMENSIONS

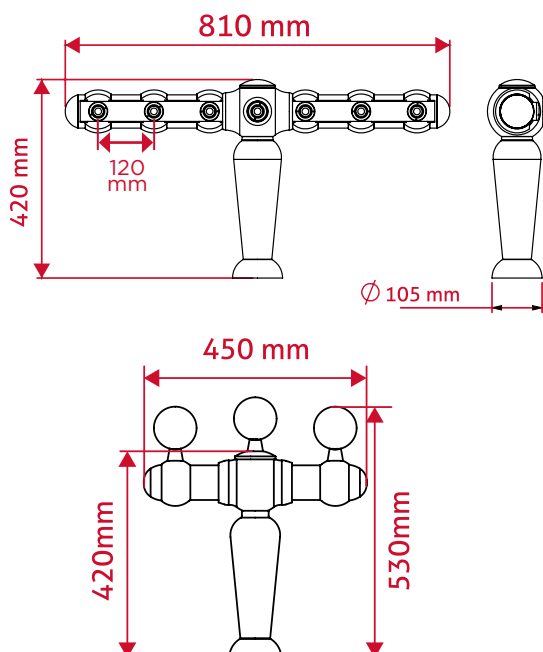

Body:

- Brass or stainless steel

Medallions:

- 80 mm LED illuminated medallions

Ways/Faucets:

- Single Tower - 3, 5 or 7
- More when using the combo junction as shown below

Available with modular system

Available without medallions



Brigitte Combo Junction

Expand your beer lines.

Can be purchased as a spare part.

Starlite



Body:

- Polished stainless steel


Medallions:

- Illuminated medallion available

Ways/Faucets:

- 1 to 5

DIMENSIONS

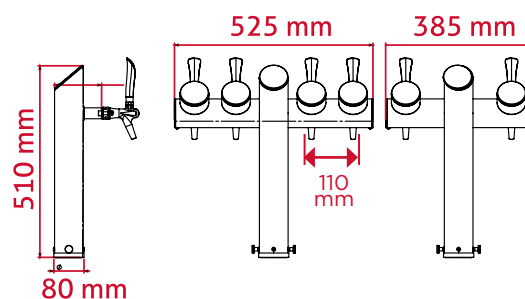

Stardust



Body:

- Polished stainless steel


Medallions:

- Available with 80 mm LED illuminated medallions

Ways/Faucets:

- 3, 4 or 5

DIMENSIONS

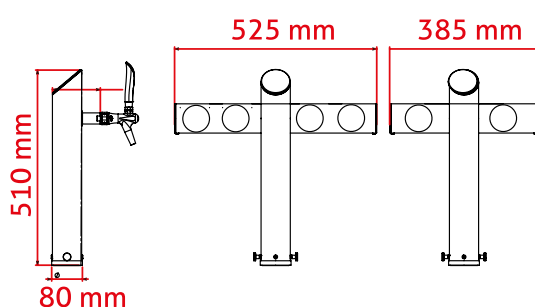

Pearl

Body:

- Front side in ABS, injection molded and painted.
- With injection molded PC extra large medallion.
- Back side in high pressure die cast aluminium, anodized, satin finish, painted as front side.

Medallions:

- Available with 80 or 120 mm LED illuminated medallions

Ways/Faucets:

- 1

Dimensions without tap (Height x Width x Depth):

- 590 x 120 x 140 mm

MOQ 200 pcs.



Different colours
and finishes
available



Twist

Body:

- Resin with painted finish
- Rhombus LED illuminated logo
- Rhombus LED illuminated ring

Ways/Faucets:

- 1

Dimensions without tap (Height x Width x Depth):

- 467 x 110 x 200 mm

MOQ 100 pcs.



Old Brewery



Body:

- Brass with gold or copper finish

Medallions:


- Available with 80 mm LED illuminated medallion

Ways/Faucets:


- 2 to 9



DIMENSIONS

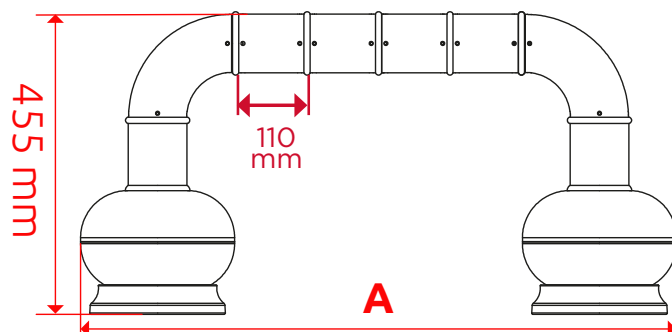

A: 4 ways - 904 mm | 5 ways - 1023 mm
6 ways - 1122 mm | 7 ways - 1230 mm
8 ways - 1340 mm | 9 ways - 1450 mm

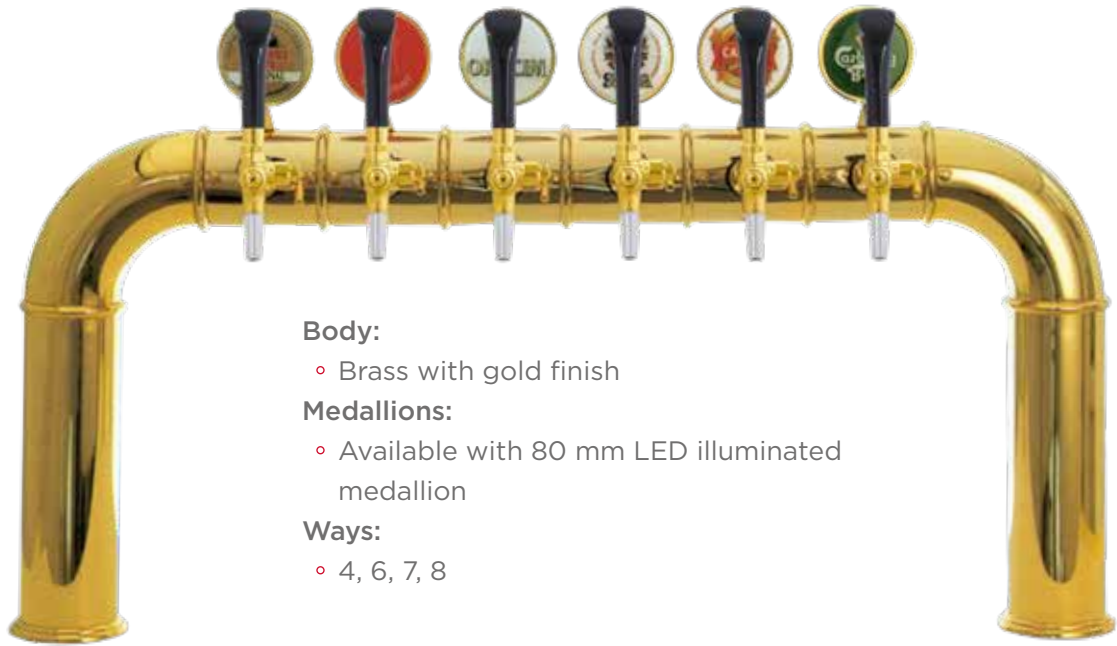

Body:

- Brass with gold finish


Medallions:

- Available with 80 mm LED illuminated medallion

Ways:

- 4, 6, 7, 8

DIMENSIONS

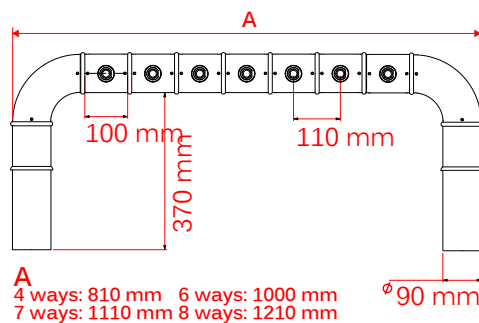

MOQ 30 pcs.

Oblò

Body:

- Brass with matte gold finish

Medallions:

- 120 mm LED illuminated front logo

Ways:

- 1

Dimensions without tap

(Height x Width x Depth):

- 495 x 450 x 105 mm

Dimensions without tap/base

(Height x Width x Depth):

- 430 x 120 x 105 mm

MOQ 100 pcs.



Trittico

Body:

- Brass with chrome or gold finish

Medallions:

- Available with 80 or 120 mm LED illuminated medallions

Ways:

- 3

Dimensions without tap, without medallions

(Height x Width x Depth):

- 580 x 390 x 200 mm



Parigi

Body:

- Brass with chrome, gold or copper finish

Medallions:

- Available with 80 or 120 mm LED illuminated medallions

Ways:

- 1,2

Dimensions without tap, without medallions

(Height x Width x Depth):

- 480 x 140 x 140 mm



Praga

Body:

- Brass with gold finish
- Ceramic plaque with logo

Medallions:

- Available with 80 or 120 mm LED illuminated medallions

Ways:

- 1

Dimensions without tap, without medallions

(Height x Width x Depth):

- 500 x 140 x 140 mm

Belgio

Body:

- Brass with chrome, gold or copper finish

Medallions:

- Available with 80 or 120 mm LED illuminated medallions

Ways/Faucets:

- 1 or 2

Dimensions without tap

(Height x Width x Depth):

- 485 x 105 x 105 mm



Anversa

Body:

- Brass with chrome or gold finish

Medallions:

- Available with 80 or 120 mm LED illuminated medallions

Ways:

- 4

Dimensions without tap

(Height x Width x Depth):

- 490 x 270 x 145 mm



Zeus

Body:

- Black, white or green ceramic
- Brass with chrome or gold finish

Medallions:

- Available with 80 or 120 mm LED illuminated medallions

Ways/Faucets:

- 3 to 5

Dimensions without tap

(Height x Width x Depth):

- 680 x 210 x 210 mm



Sax

Body:

- This is a real Saxophone!

Medallions:

- Available with 80 or 120 mm LED illuminated medallion

Ways/Faucets:


- 1

Dimensions without tap

(Height x Width x Depth):

- 700 x 600 x 190 mm



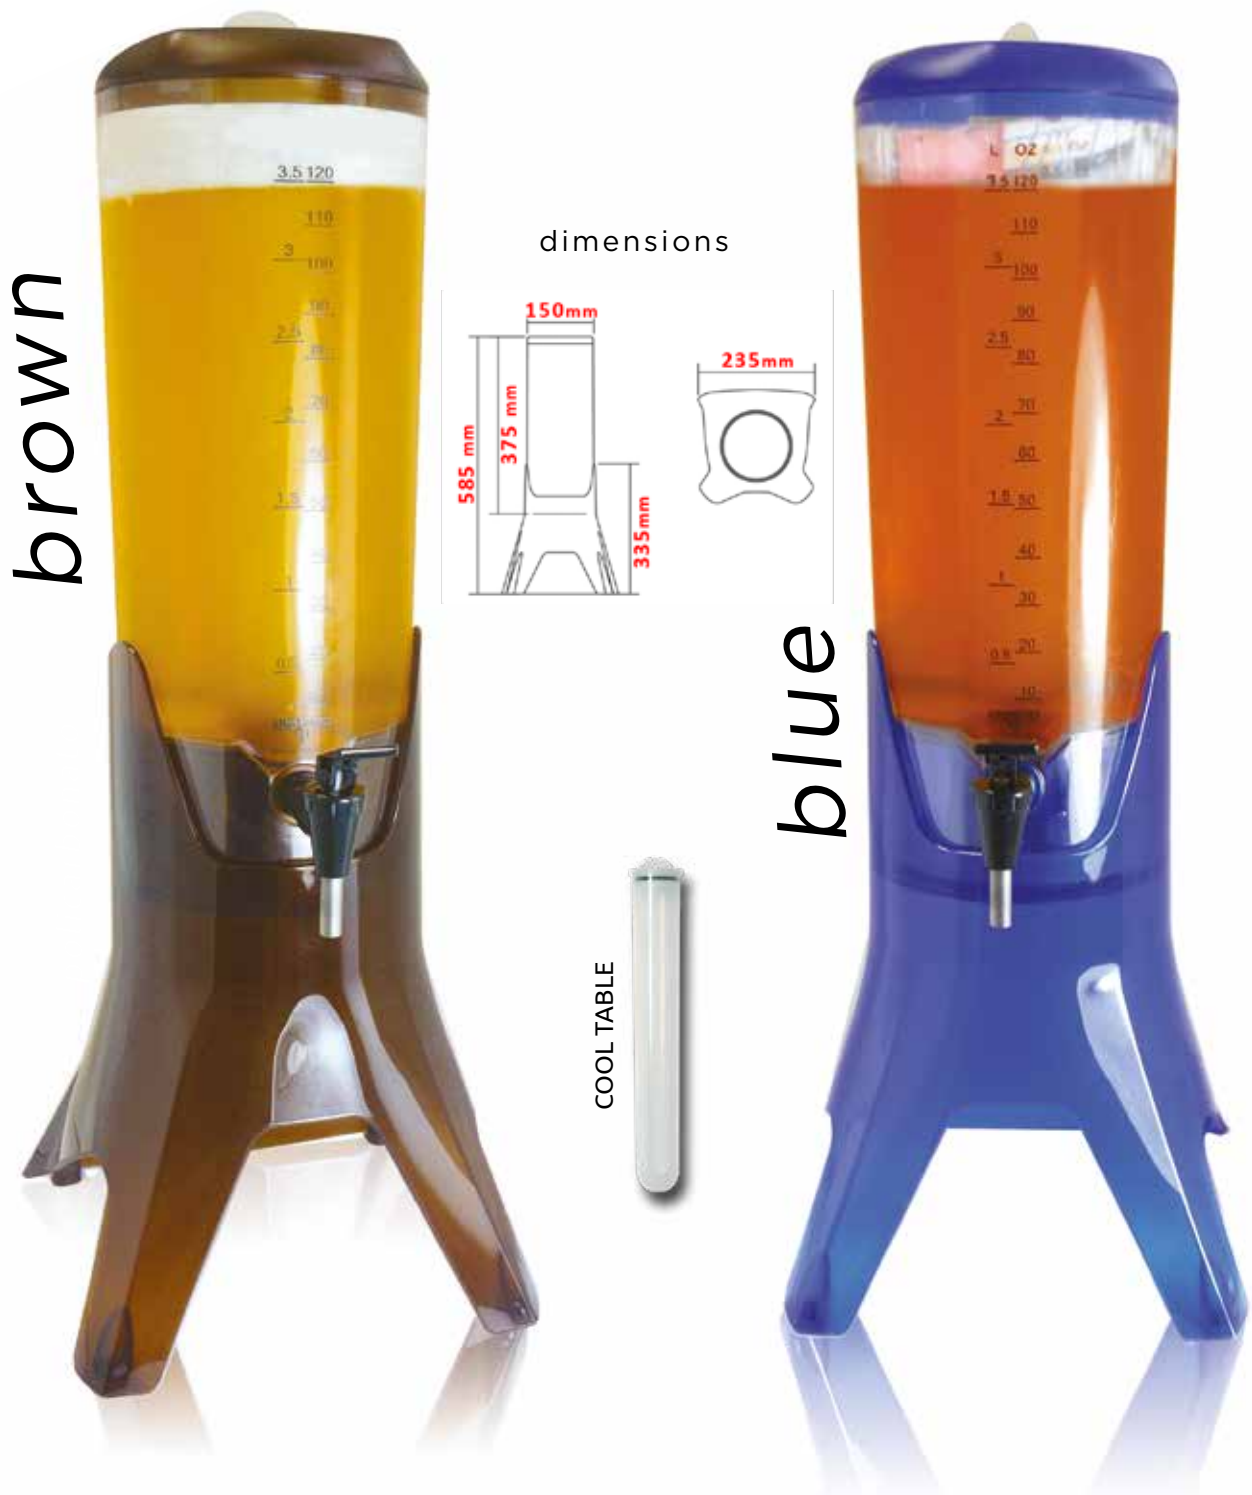

- All components can be easily cleaned and sanitized.
- It involves the end-consumer to dispense his own drink.
- It's ideal for parties.

Body:

- Base and lid in ABS, blue or brown
- Cylinder in polycarbonate

Capacity:

- 3.5 L

Dimensions without tap

(Height x Width x Depth):

- 570 x 360 x 350 mm

HACCP approved

- Tap in st. steel and plastic
- Optional ice cylinder to keep beer cold

Bespoke products



Bloom Beck's

Body:

- Brass with chrome finish
- 80 mm LED illuminated medallion

Ways/Faucets:

- 1

Multi-colour illuminated ring kit:

- Including red, white, green or blue ring

Dimensions without tap

(Height x Width x Depth):

- 550 x 125 x 260 mm



V4

NOVA Stella Artois

Counter Top Dispense System

- Featuring the ABInBev non returnable BiB technology
- Longer lasting beer life
- 30 days after the first use, no CO2 added to the beer
- no need for cleaning the beer line
- Easy cleaning and very low maintenance required.
- No-frost technology.
- Plug and play.

Dimensions without tap

(Height x Width x Depth):

- 717 x 450 x 716 mm



Eiffel

- Featuring the ABInBev non returnable BiB technology
- Longer lasting beer life
- 30 days after the first use, no CO2 added to the beer
- no need for cleaning the beer line
- Easy cleaning and very low maintenance required.
- To be used in combination with a direct draw keg box (air-cooled).

Dimensions without tap

(Height x Width x Depth):

- 600 x 205 x 295 mm

Carling Black Label

Body

- ABS with front plate in Zamak
- Upper LED illuminated plaque.

Ways

- 1

Available with:

- Chrome, gold or painted finish.
- Front laser cut and LED illuminated logo.
- Front laser engraved logo

Dimensions without tap

(Height x Width x Depth):

- 700 x 144 x 200 mm



Club Colombia

Body

- ABS with front plate in Zamak
- Upper LED illuminated plaque.

Ways

- 1

Available with:

- Chrome, gold or painted finish.
- Front laser cut and LED illuminated logo.
- Front laser engraved logo

Dimensions without tap

(Height x Width x Depth):

- 700 x 144 x 200 mm

Castle

Body

- Central plate with condensation effect.
- 3D LED illuminated fish-eye lens.

Ways

- 1

Dimensions without tap

(Height x Width x Depth):

- 530 x 80 x 130 mm



Shopper

Body

- Front metal plate with laser cut and LED illuminated logo.
- Front plate with rough or smooth finish.
- LED illuminated sides.

Ways

- 1

Dimensions without tap

(Height x Width x Depth):

- 450 x 200 x 130 mm



Strongbow Apple Ciders

Body

- Core structure made in fiber glass & nylon.
- Front and rear cladding in white coloured PMMA (acrylic glass)
- LED illuminated embossed wordmarks/logo.
- ABS side panels with wood finish hydrocoating.
- 80 mm side fish-eye lenses.
- Clamp-on or Through-the-bar fixing solution

Ways

- 1

Available with standard tap or CFT tap

Cool Flow Technology version / inline cooling

Dimensions without tap

(Height x Width x Depth):

- 527 x 80 x 130 mm



Heitube

Body

- Stainless steel with brushed finish.
- LED illuminated medallion
- In-Line cooling.
- Available with flat or 45° cap

Ways

- 1

Dimensions without tap

(Height x Width x Depth):

- 580 x 147 x 85 mm



Arrow & Sharrow

Body

- Brass with chrome finish
- LED illuminated medallion
- Inline Cooling

Ways

- 1

Dimensions without tap

(Height x Width x Depth):

- 445 x 75 x 180 mm

Arrow



Sharrow



Dart

Body

- New Vin Service tower, body in aluminium and chromed ABS,
- LED illuminated lens with 3D fish-eye effect

Adapt the tower to the current marketing trends:

- Easy to replace 69 mm medallion with fish-eye effect.
- Replace the cladding to refresh the tower with a new design.

Compatible with Heineken CFT, David, Inline Cooling tubing systems.

Ways

- 1

**Dimensions without tap
(Height x Width x Depth):**

- 705 x 78 x 200 mm



Heineken Exclusive



Dart

Be creative!

- Flexibility is a sign of life!
- Countless customized finishes and special paints with matte or pearl effect.
- Combine colours and textures.
- Get inspired by our finishes or propose your own.



Back-counter option

- Increased brand visibility thanks to our back-counter logo.



Maximum flexibility - cost saving solution:

- Change only the cladding and keep the rear technical part

Create your Dart!



1 Choose your style

Lens: LED illuminated 69 mm
Cover and body: metal, paint or hydrocoating?
Cover: front sticker?



2 Which configuration?

A: standard Inline dispense?
B: David?
C: Heineken Cool FlowTechnology



3 Easily install and drink!

Through the bar? Clamp on? David?

Tailormade solution for Dart

Sagres

Body

- Front part in ABS colour red with 2 Sagres stickers on the sides and shield-shaped Sagres branded plaque
- Rear technical part in anodized aluminium

Body (tap)

- CFT tap with compensator and Sagres branded handle colour red

Ways

- 1

Dimensions without tap

(Height x Width x Depth):

- 705 x 78 x 200 mm



Affligem

Dispensing tower CFT / NCFT

Body (front)

- ABS, injection moulded and painted with debossed decoration theme.
- Medallion lens with logo on top, made in injection moulded PC.

Body (back)

- High pressure die cast aluminium, anodized, satin finish, painted as front.

Body (tap)

- Chrome plated zamak alloy, painted metallic blue, with debossed logo.

Ways

- 1

Complete with CFT/NCFT tubing Vin Service, backlit lens with Affligem logo and transformer.

Dimensions without tap

(Height x Width x Depth):


- 590 x 120 x 140 mm




CFT towers

Heineken exclusive

Bridge CFT

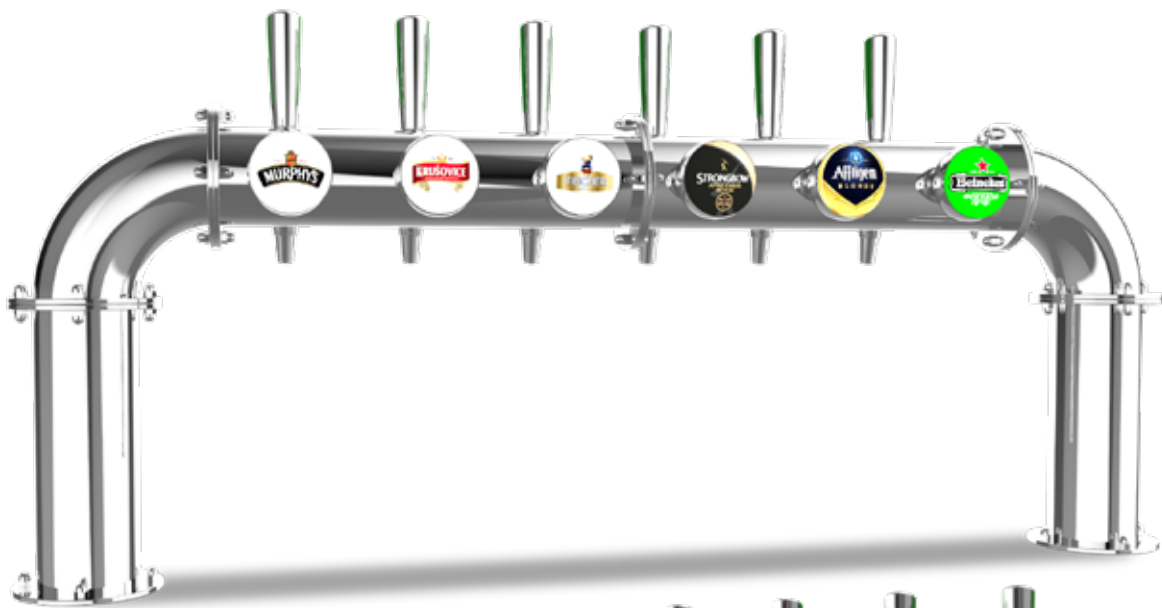


DIMENSIONS

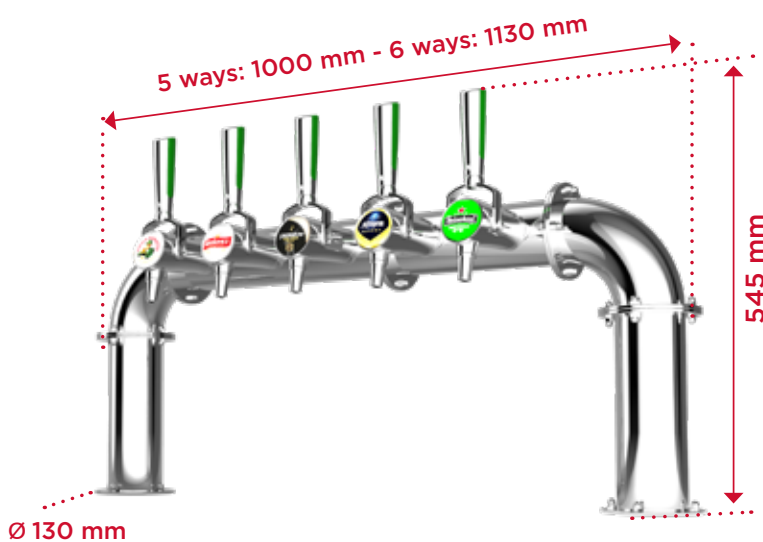


- CFT system with lighted and customizable tap
- Customizable tap handle
- Lighted and customizable 69 mm front medallions
- Stainless steel body, aesthetical nuts and flanges
- 4, 5 or 6 ways

Flag CFT

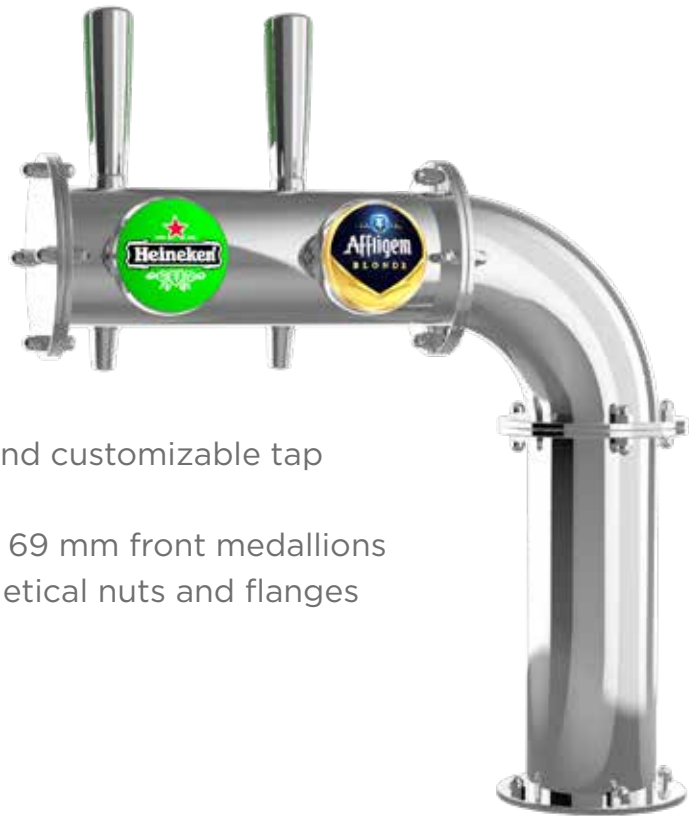

- CFT system with lighted and customizable tap
- Customizable tap handle
- Lighted and customizable 69 mm front medallions
- Stainless steel body, aesthetical nuts and flanges
- 2 or 3 ways

Ø 130 mm

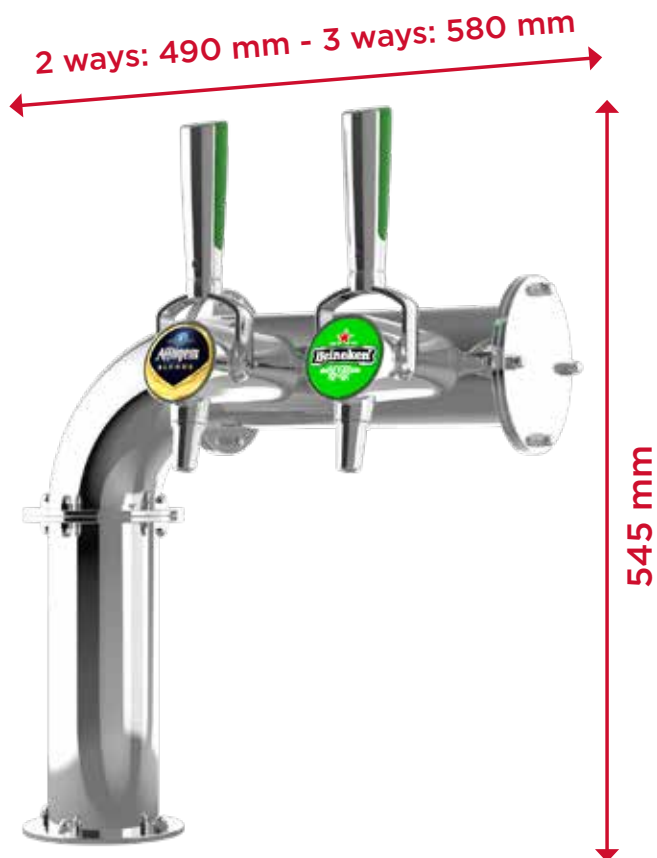


CFT towers

Heineken exclusive


Fall CFT

- Chromed ABS lateral covers
- Anodized natural grey frontal body and head
- Chromed ABS base
- Lighted and customizable 69 mm and 120 mm front medallions
- Stainless steel rear plate
- Customizable tap handle
- Chromed ABS rear
- CFT system with lighted and customizable tap
- 2 ways

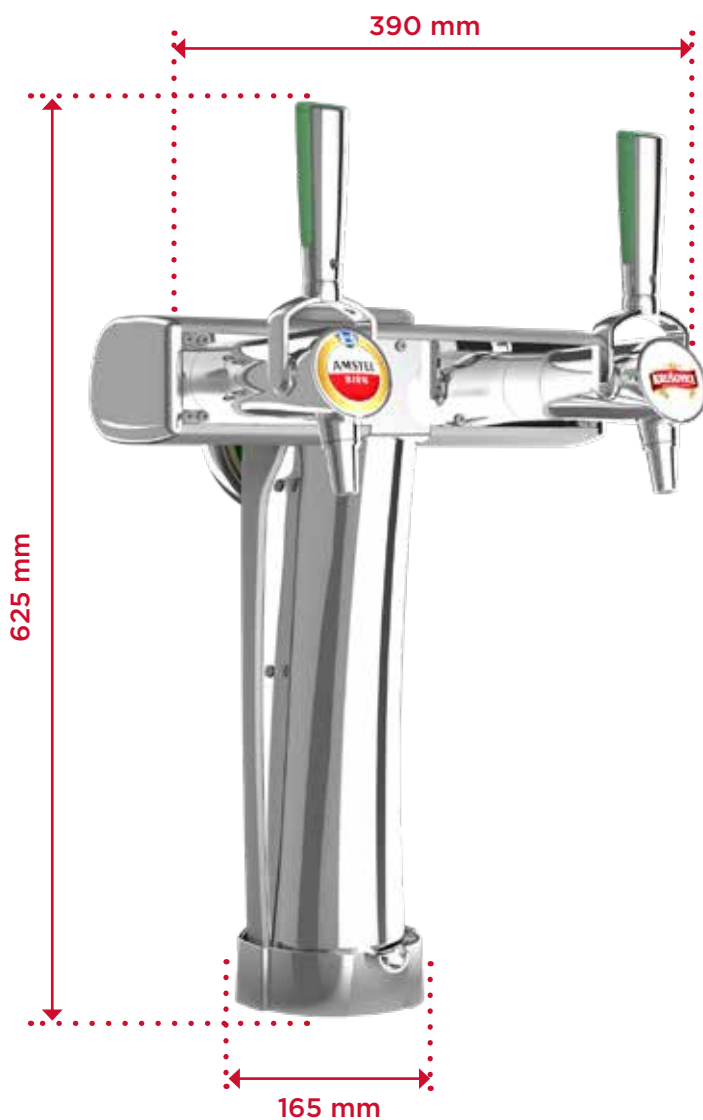

T Pillar CFT

- Chromed ABS cover
- Stainless steel body
- Lighted and customizable 69 mm front medallions
- Customizable tap handle
- CFT system with lighted and customizable tap
- 2 or 3 ways

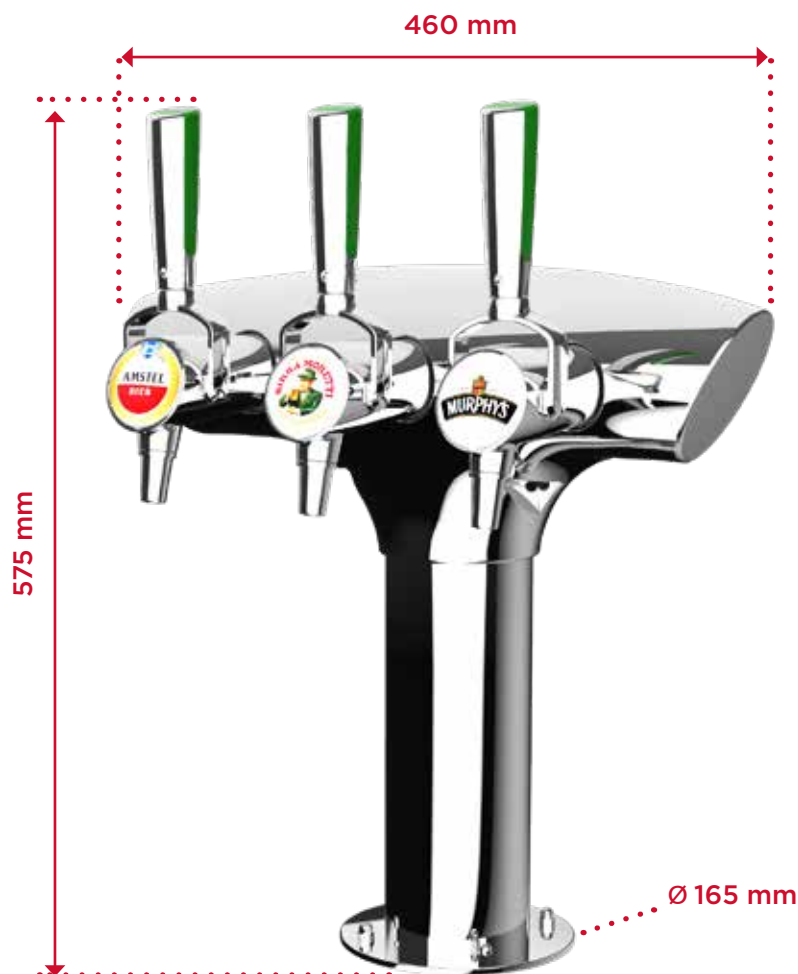

Asahi Exclusive

Peroni

Body

- New illuminated ribbon.
- Improved insulation system up to the beer tap.
- Led illuminated on both side lenses and front panel.
- Fully condensated version.
- Built-in drain base.

Ways

- 1
Dimensions without tap
(Height x Width x Depth):
 - 720 x 125 x 260 mm



Pilsner Urquell

2nd generation

Body

- Copper with hammering effect
- Printed logo on sides
- Front exclusive plate

Ways

- 1

Dimensions without tap
(Height x Width x Depth):

- 550 x 118 x 290 mm



Asahi Exclusive

Pillar

Body

- Stainless steel.
- Rhodium-plated steel and anodized extruded aluminium.
- Built-in premium fish-eye lenses.

Ways

- 2 to 5

Dimensions without tap

(Height x Width x Depth):

- 705 x 780 x 200 mm



Gambrinus multiple tap

Body

- Stainless steel.
- Rhodium-plated steel and anodized extruded aluminium.
- Built-in premium fish-eye lenses.

Ways

- 2 to 5

Dimensions without tap

(Height x Width x Depth):

- 705 x 780 x 200 mm



Pillar Pilsner Urquell

Body

- Stainless steel.
- Rhodium-plated steel and anodized extruded aluminium.
- Built-in premium fish-eye lenses.

Ways

2 to 5

Dimensions without tap

(Height x Width x Depth):

- 705 x 780 x 200 mm

Tyskie

Body

- ABS with front plate in Zamak.
- Upper LED illuminated plaque.

Available with:

- Chrome, gold or painted finish.
- Front laser cut and LED illuminated logo.
- Front laser engraved logo.

Ways

- 1

Dimensions without tap

(Height x Width x Depth):

- 705 x 144 x 200 mm



DM Select

Fresh beer every time from first to the last drop:

- Smoother without added CO2.

31 days shelf-life after keg opening:

- Less beer waste

Easy handling & cleaning:

- Plug & play draft system with light oneway pressurized kegs

Green impact:

- No cleaning of kegs and reduced transport of kegs

Ways

- 1

Dimensions without tap

(Height x Width x Depth):

- 550 x 320 x 550 mm



Chang

Body

- Featuring illumination on the upper branded medallion, the central section and the Chang brand on the body.
- Green and champagne colours.

Ways

- 1

Dimensions without tap

(Height x Width x Depth):

- 621 x 137 x 141 mm

Body

- aluminium and fiber glass

Premium



Core



Body

- polycarbonate and glass
- fiber



LIFE

Internet Of Things


Predictive maintenance:

- Geotagging
- Historical analysis of performance
- Monitoring of components
- Predictive analysis of failures
- Strategic planning of maintenance

Commercial Benefits:


- Historical analysis of sales
- Easy monitoring of marketing campaigns
- Geotagging
- Profit control in real-time
- Integrated customer communication

Reports available on the unit or on remote devices

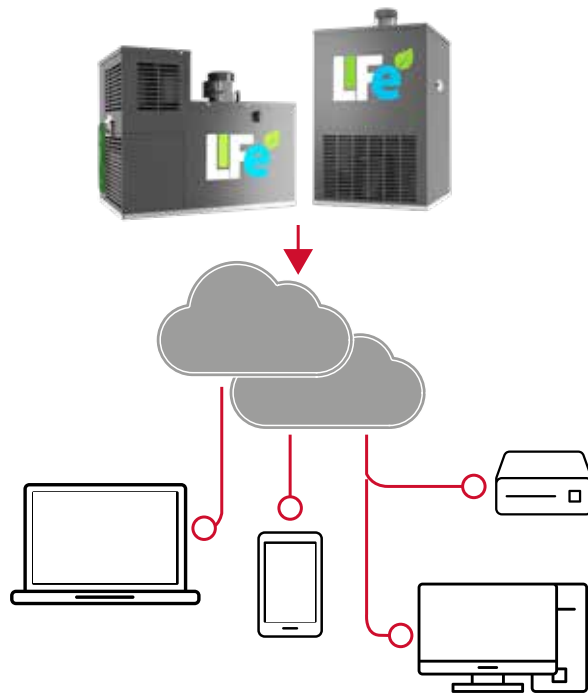


Power Consumption Comparison Between HE R404a And Life R290 Coolers


• in KWH / day

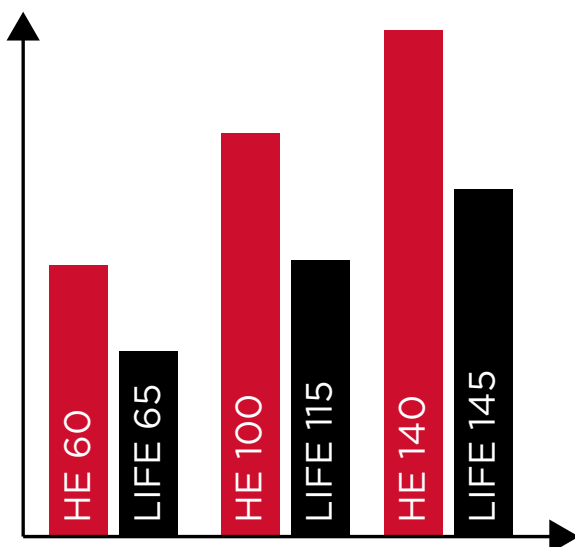

Power Consumption Comparison with Variable Speed Pump

• in KWH / day

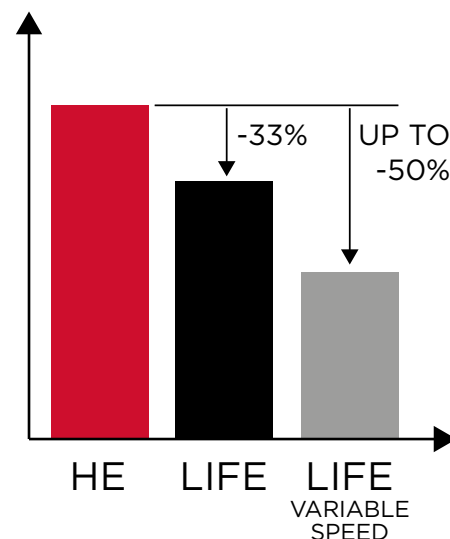

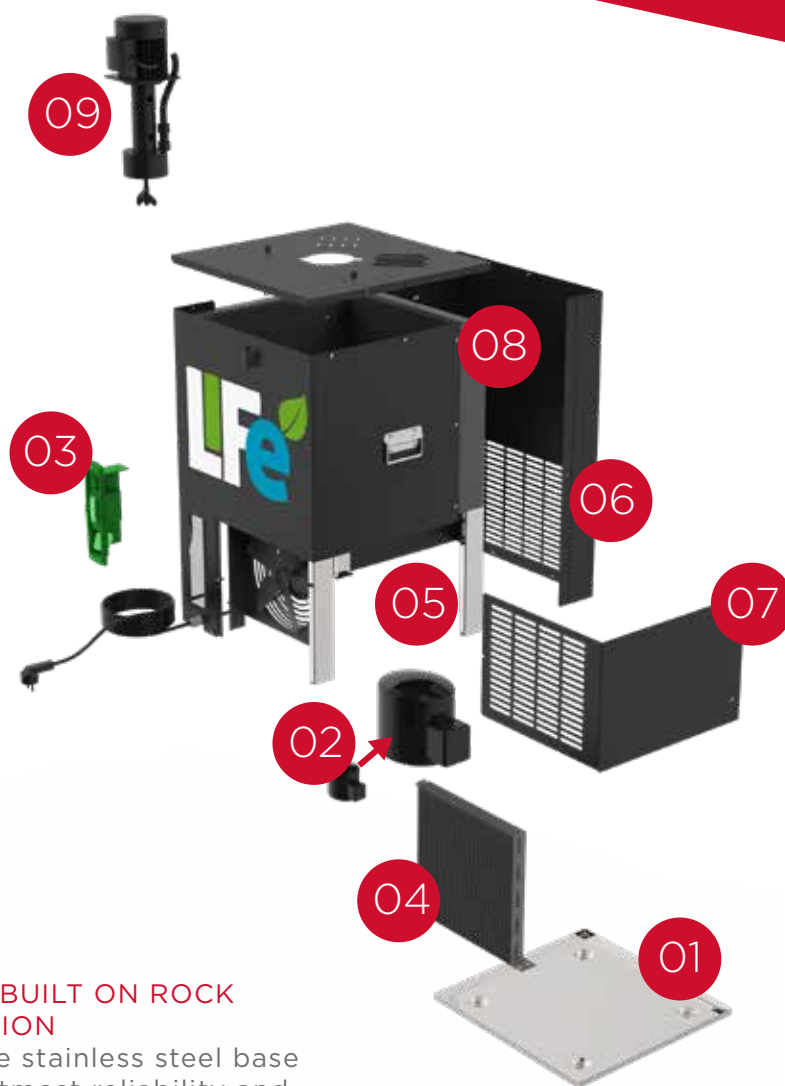

CB
CB report

01 | CAREFULLY BUILT ON ROCK SOLID FOUNDATION

A no-compromise stainless steel base guarantees the utmost reliability and durability along decades. Sound design meets stylish look.

02 | UP TO 60% MORE COOLING POWER

With respect to corresponding models within the current HE Series.

03 | ONE-SCREW INTEGRATED & UNIFIED ELECTRIC SWITCHBOARD Immediate access to mains switch, python pump socket and thermostat.

04 | NEW, HIGH EFFICIENCY HEAT EXCHANGER Light & compact tubeless condenser. Re-designed to maximize heat exchange and cooling efficiency.

05 | DESIGNED TO EASE MAINTENANCE AND SERVICE Unified cabling across the entire product range. Internal layout designed to allow immediate access to any serviceable item. Anytime upgrade from bimetal - to ice-thickness probe to digital thermostat as a retrofit.

06 | BREATHE EASIER!

New air intake and air outlet design.

07 | ONE-SCREW TO SERVICE EVERYTHING

Integrated condenser cover allows fast and easy service to fan motor, fan blades, clixon relay and compressor capacitor. It's all just a single screw away from you. (Vertical models only)

08 | ENHANCED TANK INSULATION

The new NUOVA60 tank features 33 mm (side) and 43 mm (base) insulation.

09 | OPTIONS: INNOVATION, GONE FURTHER. VARIABLE SPEED PYTHON PUMP

Automatically reduces power consumption when idle or at reduced flow times.

Also available with R134A

Life Technical Details

	LIFE 50	LIFE 65	LIFE 100	LIFE 115	LIFE 130	LIFE 145	LIFE 175	LIFE 250
COMPRESSOR	1/4 HP	1/4 HP	1/3 HP	1/2 L HP	1/3 HP	1/2 H HP	3/4 HP	3/4 HP
COOLANT GAS	R290	R290	R290	R290	R290	R290	R290	R290
POWER	539 W 465kcal	539 W 465kcal	697 W 602kcal	849 W 733kcal	895 W 773kcal	1033 W 892kcal	1710 W 1470kcal	1710 W 1470kcal
POWER CONSUMPTION W/hour	216	216	309	362	362	426	649	649
WATER TANK nominal capacity	18 lt.	25 lt.	36 lt.	36 lt.	50 lt.	50 lt.	70 lt.	90 lt.
ICE BANK	8 kg.	12 kg.	15 kg.	15 kg.	23 kg.	23 kg.	32 kg.	40 kg.
COOLING CAPACITY	50 lt. hour	65 lt. hour	100 lt. hour	115 lt. hour	130 lt. hour	145 lt. hour	175 lt. hour	250 lt. hour
RATE OF DRINK PER MINUTE 355 ml.	2.34	3.05	4.69	5.39	6.10	6.80	8.50	11.73
COILS	1 to 3	1 to 3	1 to 4	1 to 4	1 to 8	1 to 8	1 to 8	1 to 10
IN / OUT DRINK TEMPERATURE	24°C 4°C	24°C 4°C	24°C 4°C	24°C 4°C	24°C 4°C	24°C 4°C	24°C 4°C	24°C 4°C
NET WEIGHT	23 kg.	34 kg.	35 kg.	40 kg.	40 kg.	40 kg.	60 kg.	65 kg.
HOUSING	steel plast or AISI 304 base in AISI 430	steel plast or AISI 304 base in AISI 430	steel plast or AISI 304 base in AISI 430	steel plast or AISI 304 base in AISI 430	steel plast or AISI 304 base in AISI 430	steel plast or AISI 304 base in AISI 430	steel plast or AISI 304 base in AISI 430	steel plast or AISI 304 base in AISI 430

Anti oxidation and corrosion

- Housing in steel plast.
- Base in stainless steel.

R290 & extra fuel compressor

- Ensures green efficiency and boosts compressor power.
- Also available with gas R134A

New, high efficiency heat exchanger

- Light and compact tubeless condenser.
- Re-designed to maximize heat exchange and cooling efficiency.

Cooling power increased up to 60%





- Compared to equivalent models of HE series

One-screw to service everything

- The integrated condenser cover allows fast and easy access to fan motor, fan blades, klixon relay and compressor
- All the components are just a single screw away from you.

Voltage:

- 220/240V -50Hz | 110V-60Hz | 220V-60Hz

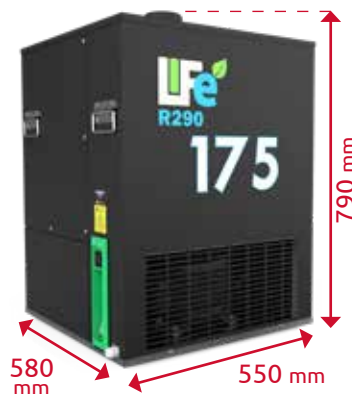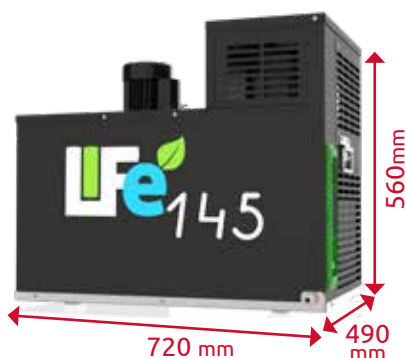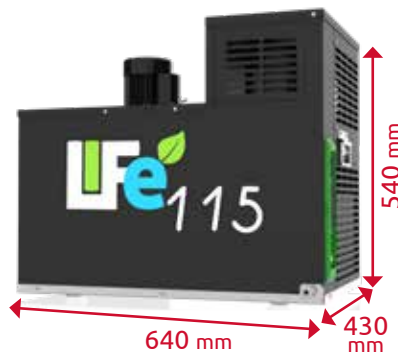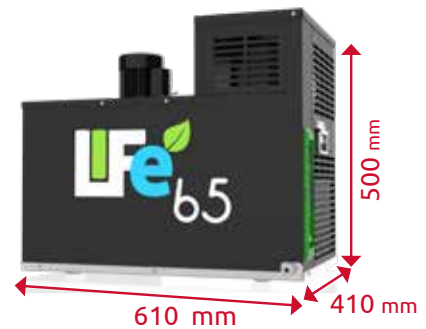

Glycol Units

	GLYCOL DECK 125	GLYCOL DECK 250	GLYCOL DECK 350	GLYCOL FLAT	GLYCOL SUPER FLAT
COMPRESSOR	3/8 HP	1/2 HP	5/8 HP	1/6 HP	1/2 HP
COOLANT GAS	R134A	R134A	R134A	R134A	R404A
BTU	2900	4100	5200	950	2800
POWER	849 W 731kcal	1201 W 1033kcal	1523 W 1311kcal	278 W 239kcal	820 W 706kcal
POWER CONSUMPTION W/hour	369	469	692	122	369
WATER TANK nominal capacity	50 lt.	50 lt.	50 lt.	12 lt.	17 lt.
RECIRCULATION PUMP	---	---	---	12 / 14	18 / 20
NET WEIGHT	35 kg.	37 kg.	38 kg.	23 kg.	42 kg.
HOUSING	steel plast	steel plast	steel plast	steel plast	steel plast

* Available in 1 Pump/1 Motor configuration (Deck not shown)

Plug Type: 5-15P. Receptacle Voltage: 115V, 60Hz. Receptacle Rated Current: 15A

Glycol Deck Weights and Dimensions may differ due to pump/motor configuration

Glycol Units




Glycol Deck 125

- Available in 1 Pump/1 Motor and 2 Pump/2 Motor configurations

Plug Type:

- L5-30P

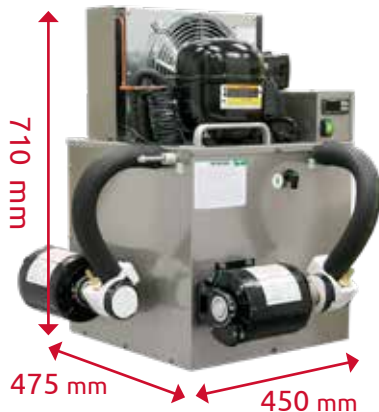


Glycol Deck 250

- Available in 1 Pump/1 Motor and 2 Pump/2 Motor configurations

Plug Type:

- L5-30P

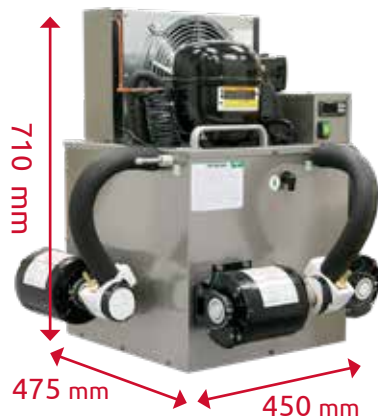

Glycol Deck 350

- Available in 1 Pump/1 Motor, 2 Pump/2 Motor and 3 Pump/3 Motor configurations

Plug Type:

- 6-20P

Flat



Super Flat



HE 600



COMPRESSOR	COOLANT GAS	POWER	ABSORBED POWER	WATER TANK	HOUSING
1 1/4 HP	R404A	2966 W	1191 W	150 lt	st. steel AISI 430

ICE BANK	COOLING CAPACITY	IN / OUT DRINK TEMPERATURE	RATE OF DRINK PER MIN.	RECIRCULATION PUMP	NET WEIGHT
70 Kg.	480 lt. / hour	25 °C / 6°C	40 X 200 cc	10 lt vertical 18 lt/min	86 Kg.

- Integrated wheels and handles for easier displacement

Craft Air no Co2 needed

- The new pre-mix cooler for PET kegs with bag.

No CO2 needed

- Integrated air compressor and pressure switch pre-set at 2.5 Bar
- Exhaust valve pre-set at 3.0 bar

PLUS:


- More than double samples poured continuously compared to the machines on the market
- Plug and play solution (ready in 20 mins.)
- Progressive cooling to avoid freezing beer.
- Colder beer in case of casual drink pouring

Ventilated condenser (not static)

- To guarantee a faster temperature pull down



Craft

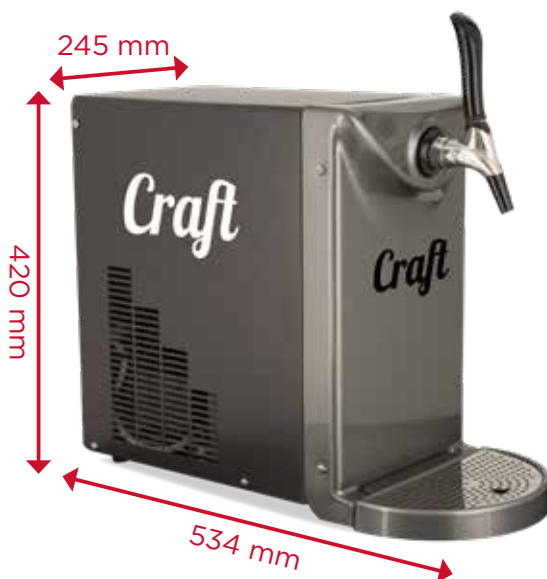

- Traditional version without air compressor Co2 required.
- For kegs in stainless steel or PET without bag

COMPRESSOR	COOLANT GAS	POWER	POWER CONSUMPTION	RATE OF DRINK PER MINUTE
1/8 HP	R134A	238 W	145 W	1 x 300cc

COILS	COOLING CAPACITY	IN / OUT DRINK TEMPERATURE	NET WEIGHT	HOUSING
20 mt	20 lt / hour	25 °C 4°C	24 kg.	STEEL PLAST

Craft Trolley Air no Co2 needed



Dimensions of inner cabinet
(Height x Width x Depth):
730 x 385 x 460 mm

- The new mobile refrigerator for ecological PET kegs
- Also available with different towers

NO CO2 needed

- Incorporated air compressor pre-set at 1.6 Bar
(Exhaust valve pre-set at 2.5 bar)

Ventilated condenser (not static)

- To guarantee a faster temperature pull down

COMPRESSOR	COOLANT GAS	POWER	POWER CONSUMPTION
1/8 HP	R600A	140 W	90 W

HOUSING	NET WEIGHT
STEEL PLAST and PLASTIC	28 kg.



Craft Trolley

CO2 required

- Traditional version without air compressor
- Also available with different towers

5 L CO2 tank

- Can be fixed on the back of the unit by using a rubber support and a steel bracket


COMPRESSOR	COOLANT GAS	POWER	POWER CONSUMPTION
1/8 HP	R600A	140 W	90 W

HOUSING	NET WEIGHT
STEEL PLAST and PLASTIC	28 kg.



Dimensions of inner cabinet
(Height x Width x Depth):
730 x 385 x 460 mm

Mini Compatto

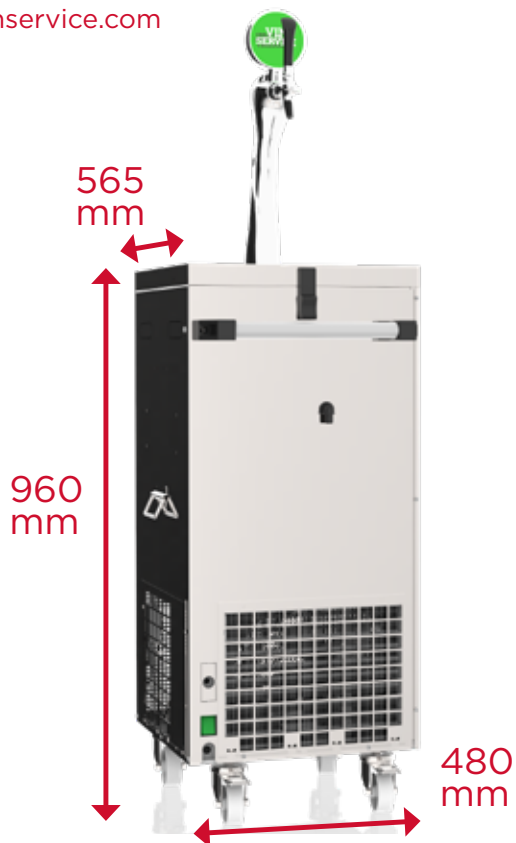

- Mobile solution with handles
- Also available with different towers

Voltage
220/240V - 50Hz
220V - 60Hz
110/115V - 60Hz

Compressor - Power - Absorbed power
in "ASHRAE 46" -5°C / +45°C
23°F / 113°F

COMPRESSOR	COOLANT GAS	POWER	RECIRCULATION PUMP	WATER TANK	RATE OF DRINK PER MINUTE
1/2 HP	R290	824 W	8/13 Ø 52,5 mm	50 lt.	10 X 200 CC

ICE BANK	COOLING CAPACITY	IN / OUT DRINK TEMPERATURE	NET WEIGHT	HOUSING	COILS
25 kg.	120 lt. / hour	25 °C / 6°C	50 kg.	AISI 430 BASE IN AISI 304 or FULLY IN AISI 304	1 - 3 27 - 24 - 21 Mt.

Compatto 3000


- Mobile solution with handles
- Also available with different towers

COMPRESSOR	COOLANT GAS	POWER	RECIRCULATION PUMP	WATER TANK	RATE OF DRINK PER MINUTE
1/2 HP	R404A or R290	991 W	8/13 Ø 52,5 mm	80 lt.	15 X 200 CC

ICE BANK	COOLING CAPACITY	IN / OUT DRINK TEMPERATURE	NET WEIGHT	HOUSING	COILS
35 kg.	180 lt. / hour	25 °C 6°C	57 kg.	AISI 430 BASE IN AISI 304 or FULLY IN AISI 304	1 - 3

Voltage
220/240V - 50Hz
220V - 60Hz
110/115V - 60Hz

Compressor - Power - Absorbed power
in "ASHRAE 46" -5°C / +45°C
23°F / 113°F

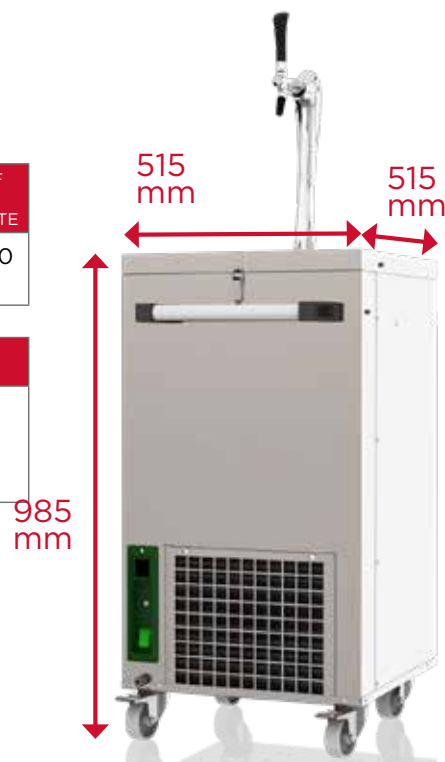

Countertop Units


	TOP 25	TOP 35	TOP 70	LIFE TOP 100	LIFE TOP 130	MINI LADY	FLAT	SUPER FLAT
COMPRESSOR	1/8 HP	1/4 HP	1/4 HP	1/3 HP	1/2 HP	1/6 HP	1/6 HP	3/8 HP
COOLANT GAS	R134A	R290	R404A	R290	R290	R134A	R134A	R134A
POWER	301 W 260kcal	520 W 447kcal	532 W 457kcal	697 W 602kcal	895 W 773kcal	274 W 235kcal	274 W 235kcal	380 W 290kcal
POWER CONSUMPTION W/hour	200	216	260	309	362	127	127	140
WATER TANK nominal capacity	12 lt.	12 lt.	25 lt.	36 lt.	50 lt.	12 lt.	12 lt.	17 lt.
ICE BANK	5 kg.	5 kg.	12 kg.	15 kg.	23 kg.	5 kg.	5 kg.	7 kg.
COOLING CAPACITY	25 lt. hour	35 lt. hour	65 lt. hour	100 lt. hour	130 lt. hour	25 lt. hour	25 lt. hour	25 lt. hour
RATE OF DRINK PER MINUTE	2 x 200 cc	3 x 200 cc	2 x 200 cc	5 x 300 cc	7 x 300 cc	3 x 200 cc	3 x 200 cc	5 x 200 cc
COILS	1 to 3	1 to 3	1 to 4	1 to 3	1 to 3	1 to 2	1 to 2	1 to 2
PUMP	AGITATOR	AGITATOR	AGITATOR	AGITATOR	AGITATOR	AGITATOR	4 / 12 Ø50mm	8 / 10 Ø37.5mm
IN / OUT DRINK TEMPERATURE	24°C 4°C	24°C 4°C	24°C 4°C	24°C 4°C	24°C 4°C	24°C 4°C	24°C 4°C	24°C 4°C
NET WEIGHT	34 kg.	34 kg.	50 kg.	35 kg.	40 kg.	23 kg.	23 kg.	42 kg.
HOUSING	steel plast	steel plast and st. steel	st. steel	steel plast or AISI 304 base in AISI 430	steel plast or AISI 304 base in AISI 430	st. steel and steel plast	st. steel and steel plast	st. steel and steel plast

Countertop Units

TOP 25



TOP 35

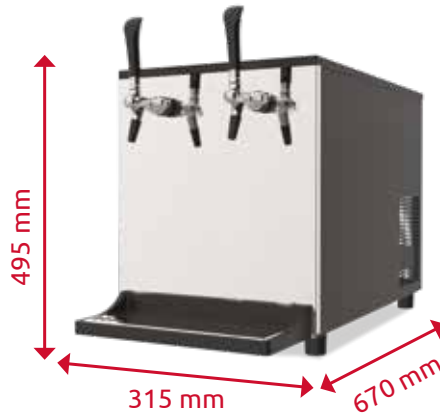

TOP 70



LIFE TOP 100




LIFE TOP 130



MINI LADY



FLAT

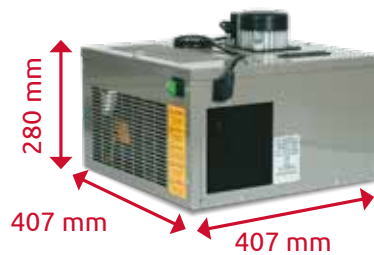

SUPER FLAT



Water and wine





SHIELD

Body:

- Brass with chrome, gold or copper finish
- Front LED illuminated plate

Medallions:

- Available with 80 or 120 mm LED illuminated medallions

Ways:

- 1 to 3 in st. steel AISI 316L

Available with condensation or ice effect



LUCKY

Body:

- Brass with chrome, gold or copper finish

Medallions:

- Available with 80 or 120 mm LED illuminated medallions

Ways/Faucets:

- 1 to 3 in st. steel AISI 316L

Available with condensation or ice effect



FLUTE

Body:

- Brass with chrome, gold or copper finish

Medallions:

- Available with 80 or 120 mm LED illuminated medallions

Ways/Faucets:

- 1 or 2 in st. steel AISI 316L

Available with condensation or ice effect

Water Cooling Units

technical details

	CRYSTAL 60	CRYSTAL	SPRING	MULTIDRINK HORECA
COMPRESSOR	1 / 8 HP	1 / 4 HP	1 / 6 HP	1 / 4 HP
COOLANT GAS	R134A	R404A	R134A	R404A
POWER	301 W 260 Kcal	579 W 498kcal	245 W 220kcal	463 W 398Kcal
POWER CONSUMPTION W/hour	240	247	151	260
WATER TANK nominal capacity	18 lt	18 lt.	- - -	25 lt
ICE BANK	5 kg	8 kg.	- - -	10 kg
COOLING CAPACITY	60 lt hour	65 lt. hour	20 lt hour	70 lt hour
RATE OF DRINK PER MINUTE	6 x 200 cc	5 x 200 cc	3 x 200 cc	6 x 200 cc
WATER CONFIGURATION	1 Ambient temp. 1 Cold - 1 Soda	1 Ambient temp. 1 Cold - 1 Soda	1 Ambient temp. 1 Cold - 1 Soda	1 Cold - 1 Soda 2 Pre-mix
RECIRCULATION PUMP	AGITATOR	AGITATOR	DRY COOLER	8 / 10
SATURATOR	0.7 lt	0.7 lt.	0.7 lt.	1.3 lt
CARBONATION PUMP	200 lt	membrane 9 ATM	membrane 9 ATM	200 lt
IN / OUT DRINK TEMPERATURE	25°C 8°C	25°C 8°C	25°C 8°C	25°C 8°C
NET WEIGHT	29 kg	32 kg.	24 kg.	45 kg
HOUSING	steel plast	steel plast and AISI 304	steel plast	stee plast AISI 430

Water Cooling Units

CRYSTAL 60




CRYSTAL



MULTIDRINK HORECA

SPRING

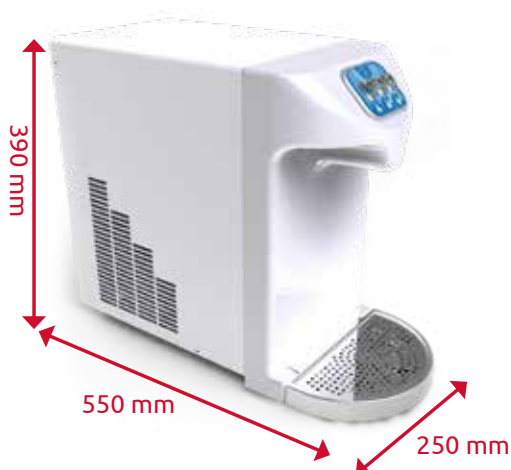

VOLTAGE
220/240V - 50Hz
220V - 60Hz

Water Cooling Units

technical details

	SPRING UNDERCOUNTER	CARBONATOR	CARBONATOR XL	CARBONATOR COOLED XL
COMPRESSOR	1 / 8 HP	---	---	---
COOLANT GAS	R134A	---	---	---
POWER	301 W 260 kcal	---	---	---
POWER CONSUMPTION W/hour	200	---	---	---
COOLING CAPACITY	20 lt. / hour (air) 40 lt. / hour (water)	180 lt.	360 lt.	360 lt.
RATE OF DRINK PER MINUTE	4 x 200 cc	---	---	---
COILS	2	---	---	---
SATURATOR	0.7 lt.	0.7 lt.	2.7 lt.	2.7 lt.
CARBONATION PUMP	membrane 9 ATM	9 ATM	245 W 400 lt. / hour	245 W 400 lt. / hour
IN / OUT DRINK TEMPERATURE	25°C 8°C	---	---	---
NET WEIGHT	24 kg.	24 kg.	18 kg.	18 kg.
HOUSING	steel plast	steel plast	steel plast	steel plast

Water Cooling Units



CARBONATOR




SPRING
UNDERCOUNTER



CARBONATOR
XL



CARBONATOR
COOLED XL

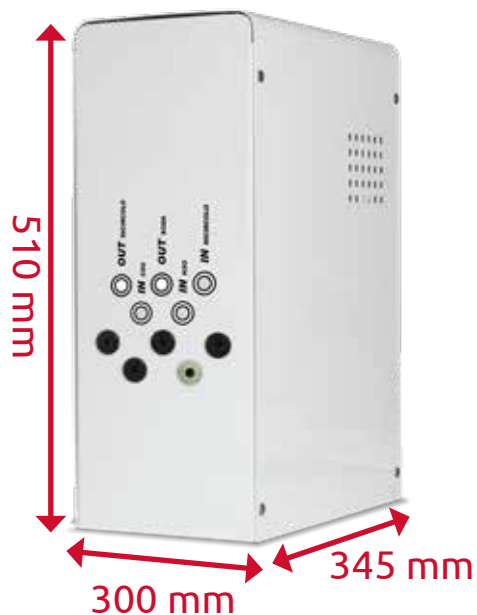

Wine Dispensers

technical details

	BOTTE	LIFE 100	FLAT	MULTIDRINK HORECA
COMPRESSOR	1 / 4 HP	1 / 3 HP	1 / 6 hp	1 / 4 hp
COOLANT GAS	R134A	R290	R134A	R134A
POWER	485 W 561 kcal	697 W 602 Kcal	293 W 252 kcal	479 W 498 kcal
COOLING CAPACITY	40 lt. hour	100 lt hour	25 lt. hour	70 lt. hour
RATE OF DRINK PER MINUTE	3 x 200 cc	9 x 200 cc	3 x 200 cc	6 x 200 cc
COILS	1 to 3	1 to 4	1 to 2	4
ICE BANK	- - -	15 kg	5 kg.	10 kg.
WATER TANK	- - -	36 lt	12 lt.	25 lt.
RECIRCULATION PUMP	- - -	7 / 11	4 / 12 Ø 50 mm	8 / 10 Ø 37.5 mm
NET WEIGHT	35 kg.	35 kg	23 kg.	42 kg.
HOUSING	resin	steel plast or AISI 304 base in AISI 430	steel plast	AISI 430

Wine Dispensers

BOTTE




Shield



Uva



LIFE 100

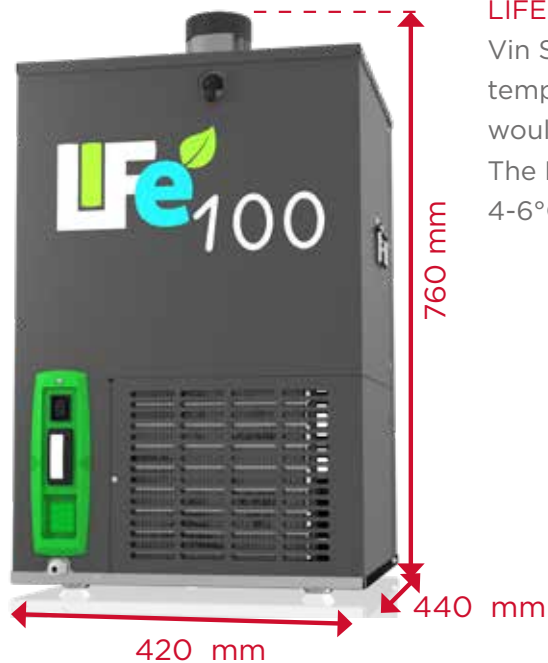

LIFE COOLER + WINE BLENDER

Vin Service produces a blender that regulates the output temperature of a single line of a Life chiller (which otherwise would cool every line at the same temperature).

The Mixer allows to dispense white wine (ideal temperature 4-6°C) and red wine (16°C) using the same cooler.

Tonella Tower



Taps



Taps



Scot

1805RUBSC

- Brass or st. steel
- 5/8" or 1/2" shank
- with compensator
- with filter for stout beers



Velox

1805VEL

- St. steel with chrome or gold finish
- 5/8" or 1/2" shank
- with or without compensator



Eva

1805ABSEVA


- ABS with black or copper finish
- with nozzle in st. steel
- 5/8" shank
- with compensator



Speedy

1805BEVSP


- Plastic with black finish
- nozzle in st. steel
- 5/8" shank
- with compensator

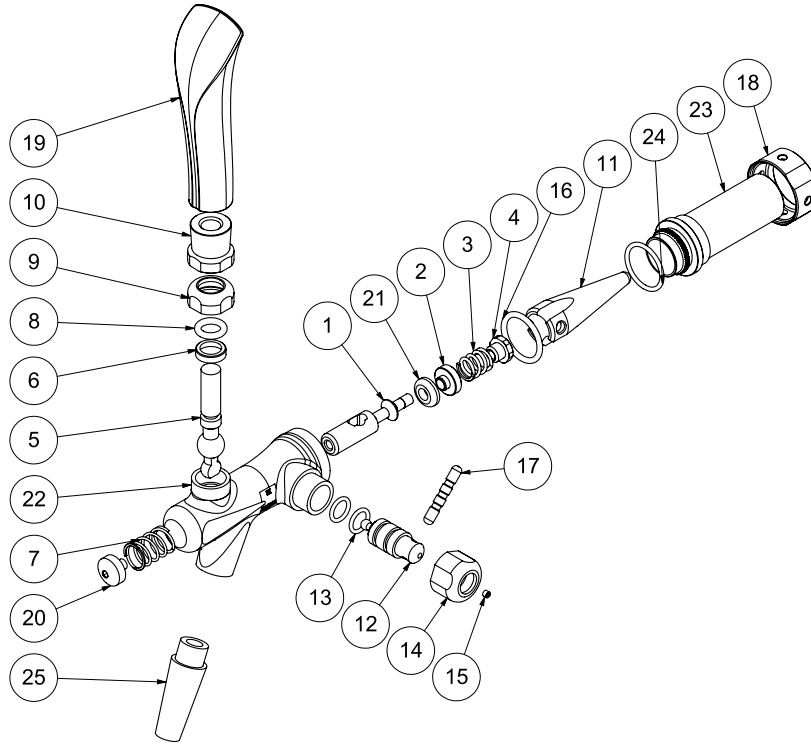

NUM.	PART NO.	DESCRIPTION
1	1820CCLPIST.000	Stainless steel piston
2	1820CCLPOGU.000	Piston gasket
3	0406RUBLEVA.000	Spring
4	1820VSFVPMO.000	Piston screw
5	1820VSFLMTR.001	Handle lever
6	0440VSFLEVM.000	Adapter
7	0406VITEPRE.000	Spring
8	0454VSFLEVM.000	O-Ring
9	0434VSFGLTR.002	Chrome nut
10	0412VSFSMTR.002	Fixing ring wiht chrome finish
11	1425VSFCOBU.00	Stainless steel compensator
12	1820VSFECTR.002	Adjustment pin
13	04542056LEV.000	(2) O-Ring
14	0434VSFGCTR.002	Adjustment pin
15	08150330ACC.00	Grub screw M 3x3
16	04541062000.000	O-Ring O200
17	1820VSFLUTR.002	Lever with chrome finish
18	0434VSFGRTR.002	Ring with chrome finish
19	0870MANORES.001	Ergonomic handle with black finish
20	1820VSFVITR.002	Front screw for compensator
21	0440VSFLAPE.000	Piston gasket
22	1817VSFCCTR.002	Flux tap chromed body
23	182003358AC.000	Nickel plated shank 5/8" x 33 mm
24	04542081LEV.000	O-Ring
25	0410FLUXBEC.000	Stainless steel nozzle with black finish



PART NO.	DESCRIPTION
FLUX WITH COMPENSATOR	
1805FLUX316.000	Flux in Stainless steel AISI 316L with black handle.
1805FLUX316.001	Flux in Stainless steel AISI 316L with chrome handle.
1805FLUXCCC.500	Flux with chrome finish. Shank length: 50 mm
1805FLUXMEC.002	Flux with chrome finish and chrome handle.
1805FLUXMEN.001	Flux with gold finish and black handle
1805FLUXMEN.002	Flux with chrome finish and black handle.
1805FLUXMEN.502	Flux with chrome finish. Shank length: 50 mm. With black handle
1805FLUXNMA.000	Flux in Stainless steel AISI 316L without black handle.
1805FLUXNOM.002	Flux with chrome finish awithout handle
SHANKS FOR FLUX TAPS	
18203312ACC.000	Shank 1/2" length 33 mm for Flux and Quix taps in stainless steel
18203358316.000	Shank 5/8" length 33 mm for Flux and Quix taps in stainless steel
182003312NI.000	Nickel-plated Shank 1/2" length 33 mm for Flux (brass version)
182003358AC.000	Nickel-plated Shank 5/8" length 33 mm for Flux (brass version)
182005058TR.000	Nickel-plated Shank 5/8" length 50 mm for Flux (brass version)
GASKET KIT	
2613ACCFLUX.000	Spare parts kit for Flux taps
KEY	
0450RUBWOLF.000	"Wolf" Key for taps opening

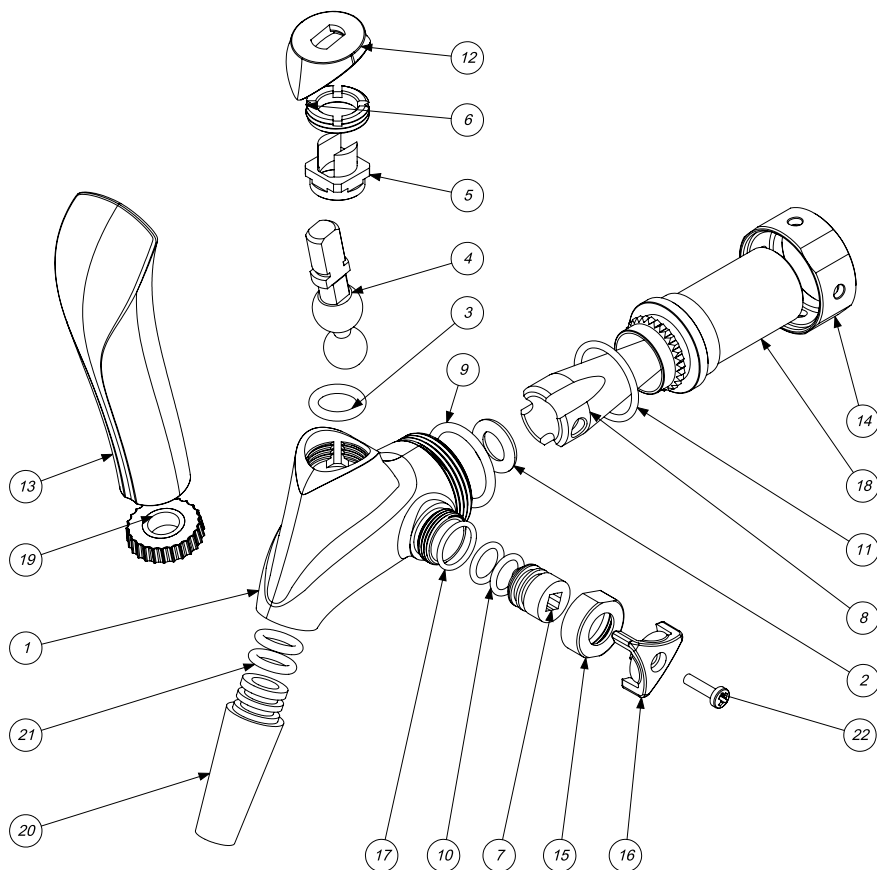

NUM.	PART NO.	DESCRIPTION
1	1817QUICCLU.000	Tap body
2	0454O353912.00	O-Ring 353912 COD4036
3	0454113FUST.000	O-Ring 113 OR3043
4	1820QUILMAS.000	Stainless steel lever
5	1820QUIBSAC.000	Lock lever
6	0434QUI18AC.000	Steel nut: M18
7	1817QUIECAC.000	Steel adjustment pin
8	1425VSFCOBU.000	Steel compensator
9	04541062000.000	Gasket O-ring
10	04542056LEV.000	External O-ring
11	04542081LEV.000	Gasket
12	0876QUIXSMN.000	Fixing ring for handle
13	0870MANORES.001	Ergonomic black handle
14	0434VSFGRTR.002	Chrome ring
15	0434QUIECTR.002	Chrome nut: M16
16	0870QUIXCOM.000	Black plastic lever for compensator
17	0454OR0120X.000	O-Ring M 1.5mm - NBR70
18	18203358316.000	ST. Steel Shank 5/8". Length 33mm
19	0422ABS2085.000	Fixing ring for handle
20	0410BEC316L.000	Stainless steel nozzle
21	0454516SPSL.000	(2) O-Ring 5/16" super seal kit
22	04880312CBA.000	Steel screw M3x12



PART NO.	DESCRIPTION
QUIX WITH COMPENSATOR	
1805QUIXMEC.500	Quix in stainless steel with chrome handle. Shank length 50 mm
1805QUIXMEN.000	Quix in stainless steel with black handle.
1805QUIXMEN.500	Quix in stainless steel with black handle. Shank length 50 mm
1805QUIXMEN.V02	Quix in stainless steel version "2.0"
KEY TO OPEN THE TAP	
0450QUIXGHI.000	Key to open the tap
GASKET KIT	
2613GNIQUIX.000	Gasket kit for Quix taps

Handles



087010ROVER.000



087015ANTIC.000



087011NOCEX.001



087011NOCEX.002



087015MOGAN.000



0870MANORES.001



0870MANORES.002
MOQ: 100 Pcs.



0870MEABSR.000
MOQ: 100 Pcs.



0870MEABSTR.002



087017438PL.000

HANDLES FOR TAPS	
PART NO.	DESCRIPTION
087010ROVER.000	Handle height 10 cm. Oak wood version
087011NOCEX.002	Handle height 11 cm. Light walnut wood version with chrome Shank
087011NOCEX.001	Handle height 11 cm. Walnut wood version with gold Shank
087011NOCEX.002	Handle height 11 cm. Walnut wood version with chrome Shank
087015ANTIC.000	Handle height 15 cm. Mahogany wood version
087015MOGAN.000	Handle height 15 cm. Antique wood version
087017438PL.000	Black plastic handle. Shank 3/8" height 17.4 cm
0870MANORES.001	Black ergonomic handle
0870MANORES.002	Green ergonomic handle
0870MEABSR.000	Red ergonomic handle
0870MEABSTR.002	Ergonomic handle with chrome finish.

PLUG AND PLAY LED ILLUMINATED MEDALLIONS WITH FISH-EYE LENSES 3D EFFECT (diameter 60, 80 or 120 mm)



MED_LUM

Single chrome or gold-plated
LED illuminated ABS medallion
Diameter 80 mm

MED_LUM

Double chrome or gold-plated
LED illuminated ABS medallion
Diameter 80 mm



MED_LUM

Triple chrome or gold-plated LED illuminated ABS medallion
Diameter 80 mm



FISH_EYE

Fish Eye Lens
(customizable with logos)
Box with 20 pieces.
Diameter: 60 or 80 mm



0850ZAMCOTR.002

Conical support in
chromed Zamak for lit
medallion



0850ZAMCOTR.001

Conical support in gold
plated Zamak for lit
medallion

MED_LUM 10036 120 mm ABS medallion
with chrome finish

MED_LUM 10037 120 mm ABS medallion
with gold finish

MED_LUM 10038 120 mm ABS Plug & Play
medallion with chrome finish

MED_LUM 10039 120 mm ABS Plug & Play
medallion with gold finish

Medallions

NUM	PART NO.	DESCRIPTION
1	0820TM812PL.000	Transparent Plexiglass "L" medallion. Height 120 mm. Diameter for the adhesive logo: 80 mm
2	0820TM812TR.001	ABS "L" medallion with gold finish. Height 120 mm. Diameter for the adhesive logo: 80 mm
3	0820TM812TR.002	ABS "L" medallion with chrome finish. Height 120 mm. Diameter for the adhesive logo: 80 mm
4	0820TORUABS.002	ABS reinforced round medallion with chrome finish for tap
5	0820TR813PL.000	Transparent plexiglass medallion for tap. Height 135 mm. Diameter for adhesive logo: 80 mm
6	0820TR813TR.001	ABS medallion with gold finish for tap. Height 135 mm. Diameter for adhesive logo: 80 mm
7	0820TR813TR.002	ABS medallion with chrome finish for tap. Height 135 mm. Diameter for adhesive logo: 80 mm
8	0820TR818PL.000	Transparent plexiglass medallion for tap. Height 180 mm. Diameter for adhesive logo: 80 mm
9	0820TR818TR.001	ABS medallion with gold finish for tap. Height 180 mm. Diameter for adhesive logo: 80 mm
10	0820TR818TR.002	ABS medallion with chrome finish for tap. Height 180 mm. Diameter for adhesive logo: 80 mm
11	2620TONDCOL.001	Round medallion in gold plated brass for ceramic tower. Diameter for adhesive logo: 80 mm
12	2620TONDCOL.002	Round medallion in chrome plated brass for ceramic tower. Diameter for adhesive logo: 80 mm
13	2620TONDDOP.001	Double medallion in gold plated brass for ceramic tower. Diameter for adhesive logo: 80 mm
14	2620TONDDOP.002	Double medallion in chrome plated brass for ceramic tower. Diameter for adhesive logo: 80 mm
15	2620TONDPAN.001	Round medallion in gold plated brass for Panther tower. Diameter for adhesive logo: 80 mm
16	2620TONDPAN.002	Round medallion in chrome plated brass for Panther tower. Diameter for adhesive logo: 80 mm
17	2620TONDRVS.001	Round medallion in gold plated brass for dispensing tap. Diameter for adhesive logo: 80 mm
18	2620TONDRVS.002	Round medallion in chrome plated brass for dispensing tap. Diameter for adhesive logo: 80 mm
19	2620TONDTRI.001	Triple medallion in gold plated brass with medallion holder. Diameter for adhesive logo: 80 mm
20	2620TONDTRI.002	Triple medallion in chrome plated brass with medallion holder. Diameter for adhesive logo: 80 mm
21	2620TORVSPE.001	Round tall medallion in gold plated brass including pin height 76 mm
22	2620TORVSPE.002	Round tall medallion in chrome plated brass including pin height 76 mm
	0335BIPi811.000	White flat plaque in PVC. Diameter 80 mm
	0335TMTERBI.000	White plaque for illuminated medallions. Diameter 80 mm
	0336TPITRSP.000	Transparent flat plaque. Diameter 80 mm



1



2



3



4



5



6



7



8



9



10



11



12



13



14



15



16




17



18




19

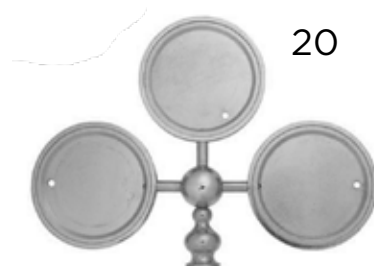

20



21



22

Drip trays

NUM.	PART NO.	DESCRIPTION
Bases 50 cm		
1	28106050ACR.000	Base 60x50 cm in stainless steel with glass rinser
2	28108050ACR.000	Base 80x50 cm in stainless steel with glass rinser
3	28101050ACR.000	Base 100x50 cm in stainless steel with glass rinser
4	28101250AC.000	Base 120x50 cm in stainless steel with glass rinser
Bases 40 cm		
5	BASE_60x40	Base 60x40 cm stainless steel (available with or without glass rinser)
6	BASE_60X40	Base 60x40 cm with gold finish (available with or without glass rinser)
7	BASE_40x40	Base 40x40 cm stainless steel (available with or without glass rinser)
8	BASE_40X40	Base 40x40 cm with gold finish (available with or without glass rinser)
Bases 25 cm		
9	BASE_40x25	Base 40x25 cm stainless steel (available with or without glass rinser)
10	BASE_40x25	Base 40x25 cm with gold finish (available with or without glass rinser)
Drip Trays with glass rinser		
11	28154022RSA.000	Drip tray 40x22 cm in stainless steel with glass rinser
12	28154022RSX.000	Drip tray 40x22 cm in stainless steel / brass with glass rinser
13	28156022RSA.000	Drip tray 60x22 cm in stainless steel with glass rinser
14	28155016ABN.000	Drip tray in black ABS with drainage 50X16 cm
15	28156016NSA.000	Drip tray in black ABS with drainage 60X16 cm
16	28154516NSA.000	Drip tray in stainless steel with drainage 45x16 cm
17	28156022RNX.000	Drip tray 60x22 cm in stainless steel / brass with glass rinser
18	28154516RSA.000	Drip Tray 45x16 cm in st. stainless steel with glass rinser
Drip Trays without glass rinser		
19	28156022NNA.000	Drip tray 60x22 cm in stainless steel
20	28154022NNA.000	Drip tray 40x22 cm in stainless steel
21	28156022NNX.000	Drip tray 60x22 cm in stainless steel / brass
22	28155025NNA.000	Drip tray 50x25 cm in stainless steel
23	28154022NNX.000	Drip tray 40x22 cm in stainless steel / brass
24	28151522NNA.000	Drip tray 15x22 cm in stainless steel
25	28151522NNX.000	Drip tray 15x22 cm in stainless steel / brass
26	28154516NNA.000	Drip tray 45x16 cm in stainless steel
Recessed Drip tray in stainless steel with glass rinser		
27	28166022RSA.000	Recessed Drip tray 60x22 cm in stainless steel with glass rinser
28	28168022RSA.000	Recessed Drip tray 80x22 cm in stainless steel with glass rinser
Drip trays with cut out		
29	281742150NA.000	Drip tray 40x22 cm in stainless steel with cut out Ø 15 cm
30	281755210NA.000	Drip tray 50x25 cm in stainless steel with cut out Ø 21 cm
31	281755250NA.000	Drip tray 50x25 cm in stainless steel with cut out Ø 25 cm
32	281742150NX.000	Drip tray 40x22 cm in stainless steel / brass with cut out Ø 15 cm
Spare parts		
33	2825RINFSCA.000	Glass rinser for drip tray with drain
34	0464CARSCAR.000	Drain kit for drip trays with glass rinser including nut 1/2", straight drain tubing Ø 7 mm., elbow drain tubing diameter 11 mm, PVC gasket
35	2825RINFRAC.000	Complete glass rinser in stainless steel
36	2825RINFRFK.000	Glass rinser for bases: 60-80-100-120X50cm
	0464SCARC11.000	Drain Kit for Drip Tray

1 to 4



Base in stainless steel
with glass rinser

5 to 8



Base in stainless steel
with / without glass rinser

9 and 10



Base in stainless steel

11 to 18




Drip tray in stainless steel
with glass rinser

19 to 26



Drip tray in stainless steel
without glass rinser

27 and 28

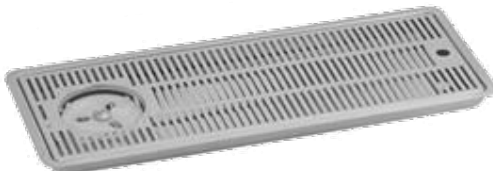

Recessed Drip tray
in stainless steel
with glass rinser

29 to 32



Drip tray with cut out.
With or without glass rinser

34



0464CARSCAR.000
Drain kit for drip trays
with glass rinser including
nut 1/2", straight drain
tubing diameter 7 mm.,
elbow drain tubing
diameter 11 mm.,
PVC gasket

35




2825RINFSCA.000
Glass rinser for drip
tray with drain

36



2825RINFRFK.000
Glass rinser for bases
60-80-100-120x50cm


Clamp




1



2



3



4



5



6



7 - 8



9 - 10

NUM	PART NO.	DESCRIPTION
1	28051010RCB.001	Aluminium clamp with flat base in black ABS for 1" fixing bolt + drip tray 15x15 cm. Suitable for 1-way Lucky, Sexy Shield, Flute and Panther towers
2	280513595TR.001	"Uk style" clamp, tray to be chosen among 3 versions
	28052518RCV.003	Clamp for ceramic towers Ø 180/160 mm. Drip tray available dimensions: 40x22-50x25-60x22 cm
	CLAMP 6703	Aluminium clamp with base in chrome ABS for 1" fixing bolt + drip tray 15 x 15 cm Suitable for 1-way Lucky, Sexy Shield, Flute and Panther towers
	CLAMP 6844	Aluminium clamp with flat base in black ABS for 1" fixing bolt + drip tray 27 X 13 cm Suitable for 2-way Lucky, Sexy Shield, Flute and Panther towers
	CLAMP 6388	Aluminium clamp with base in chrome, 1" fixing bolt. Drip tray 27X13 Suitable for 2 ways tower: Lucky, Shield, Flute
	CLAMP 7064	Aluminium clamp with flat base in black ABS for 1" 1/2 fixing bolt + drip tray 27 X 13 cm Suitable for 3-way Lucky and Shield towers and 3/4-way Sexy and Maxipanther tower
	CLAMP 7065	Aluminium clamp with flat base in chrome ABS for 1" 1/2 fixing bolt + drip tray 27 X 13 cm. Suitable for 3-way Lucky,Shield tower and for 3/4-way Sexy tower.
3	28052518RCV.001	Clamp for ceramic towers Ø 180/160 mm. Drip tray available dimensions: 40x22-50x25-60x22 cm
4	280525503CO.001	Clamp for resin towers STB h300. Drip tray available dimensions: 40x22-50x25-60x22cm
5	2805TAPBRIV.001	Tap bracket 1 way complete with drip tray 15x15 cm
	2805TAPBRIV.002	Tap bracket 1 way with drip tray 15x22 cm
	CONF.5746	Clamp 156x55 mm fro Drip tray 15x22 cm
	28151522NNA.000	Steel drip tray 15 x 22 cm.
6	280513595TR.001	"Uk style" clamp, tray to be chosen among 3 versions.
7	0335RCOB141.000	Flat base colour black hole 1"
8	0335RCOB144.000	Flat base colour black hole 1" 1/2
9	2815BRCT1TR.002	Base in chromed ABS, hole 1"
10	2815BRCT12T.002	Base in chromed ABS, hole 1"+1/2"

Stainless Steel Couplers



"S" type coupler in st. steel
with 5/8" - 5/8" Shank
5235BIS5858.DSR
without connections
5235BIS5858.DSI
with 7 mm nipple, nut and seal
5235BIS5858.DJG
with 3/8" quick fitting



"G" type coupler in st. steel
with 5/8" - 5/8" Shank
5235TRG5858.DSR
without connections
5235TRG5858.DSI
with 7mm nipple, nut and seal
5235TRG5858.DJG
with 3/8" quick fitting



Key Kegcoupler in st. steel
with 5/8" - 5/8" Shank
5235KEYKEGX.DSR
without connections
5235KEYKEGX.DSI
with 7mm nipple, nut and seal
5235KEYKEGX.DJG
with 3/8" quick fitting



"A" type coupler in st. steel
with 5/8" - 5/8" Shank
5235PIA5858.DSR
without connections
5235PIA5858.DSI
with 7mm nipple, nut and seal
5235PIA3838.DJG
with 3/8" quick fitting



"M" type coupler in st. steel
with 5/8" - 5/8" Shank
5235MIM5858.DSR
without connections
5235MIM5858.DSI
with 7mm nipple, nut and seal
5235MIM3838.DJG
with 3/8" quick fitting



"U" type coupler in st. steel
with 5/8" - 5/8" Shank
5235UEC5858.DSR
without connections
5235UEC5858.DSI
with 7mm nipple, nut and seal
5235UEC3838.DJG
with 3/8" quick fitting



"D" type coupler in st. steel
with 5/8" - 5/8" Shank
5235SVD5858.DSR
without connections
5235SVD5858.DSI
with 7mm nipple, nut and seal
5235SVD5858.DJG
with 3/8" quick fitting

Spears and cleaning adaptors



5210BICCH30.000



5210MISTA30.000



5210PIROT30.000



5210PITRI30.000



0442DSILVBS.000



0442DSILVTG.000



0442DSILVMM.000



0442DSILVPA.000



0442DSILVKK.000



SPEARS	
PART NO.	DESCRIPTION
5210201205D.000	Type 201-205 D
5210BICCH30.000	Type "S" 30 lt.
5210MISTA30.000	Type "M" 30 lt.
5210PIROT30.000	Type "A" 30 lt.
5210PITRI30.000	Type "G" 30 lt.
5210RSUW214.000	Type "U" Guinness 30 lt.
WALL MOUNTED CLEANING ADAPTER	
PART NO.	DESCRIPTION
0442DSILVBS.000	For coupler type S
0442DSILVKK.000	For keg "KeyKeg"
0442DSILVKK.OCR	For keg "KeyKeg" (with blind nut)
0442DSILVMM.000	For coupler type M
0442DSILVPA.000	For coupler type A
0442DSILVPA.OCR	For coupler type A (with blind nut)
0442DSILVTG.000	For coupler type G
0442MUROBIB.000	Wall mounted Jolly/QCD head for cleaning of dispense circuit
0442MUROCOC.000	Wall mounted Coca-Cola head for cleaning of the dispense circuit
0442SRAD12J.000	For SRA-D 1/2" quick fitting
0442BIBVITP.000	Bag-in-Box Vitop connector
0442LBOXBIB.000	Bag-in-Box Liquibox/QCD connector
0442BAGINBX.000	Bag-in-Box Lancer connector
0442BBOXCOR.000	Bag-in-Box connector 139403760
0442BBOXENC.000	Bag-in-Box Encore connector

Cleaning equipment




NUM	PART NO.	DESCRIPTION
1	5225912MNJO.000	Cleaning tank 9 lt. in stainless steel with two Jolly/QCD connections + 1 neck for beer or wine
2	5225922MNJO.000	Cleaning tank 9 lt. in stainless steel with two Jolly/QCD connections + 2 necks for beer or wine
3	5225932MNJO.000	Cleaning tank 9 lt. in stainless steel with two Jolly/QCD connections + 3 necks for beer or wine
4	8520SPUBONU.000	Glasswasher Spullboy
5	8520SPULLBO.000	Glasswasher Spullboy Twin-Go
6	48455030SACC.000	St. steel tank 50x30 cm for Spullboy
7	2840SPULSES.000	Upper brush R60115 Spulboy
8	2840SPULCEN.000	Central brush R60126 Spulboy
9	2840SPULSTR.000	Strip brush R60104 Spulboy
10	2840TRIPLAV.000	Triple brush for sink 3x18 cm
11	28458050AC1.000	Sink in St. Steel 80x50 cm - 2 tanks
12	1805LAVEOTC.000	1/2" chrome-plated tap for sink
13	8510VINSE10.000	Vin Service detergent 10 liters tank
14	8510VINSE25.000	Vin Service detergent 25 kg
15	8510BICHL10.000	Glass detergent, 1 liter
16	8510BUSMONO.000	Single-dose detergent bag
	8510TRDESMX.070	Detergent TM70 - 70Gr. active chlorine. 170 pcs. in each box
	8510DETTM70.250	Detergent TM70 - 250 ml. 40 bottles in each box
17	5225LAVARUB.000	Pump for tap cleaning
18	8520POSABIC.000	Polyethylene glass-laying grid
19	8510TRDESMX.045	Bag of detergent 45 gr. FP with active oxygen
20	8510TRDESMX.035	Bag of detergent 35 gr. CL with active chlorine
21	8527SPULA06.000	Washing sponge for tubings 6 mm. 100 pcs. in each bag
22	8527SPULA08.000	Washing sponge for tubings 6 mm. 100 pcs. in each bag
	5260GLYC25X.000	Glycol tank 25 kg.
	5260GLYC05X.000	Glycol tank 5Kg

Recirculation pumps




NUM	PART NO.	DESCRIPTION
1	3005AGVEN25.000	Agitator motor with bearings AP 220 R.p.m. 220V 50 Hz
2	3640225813A.000	Air-cooled water recirculation pump 8 meters vertical uplift/13 liters per minute 220V 50 Hz
3	3640251214B.000	Air-cooled water recirculation pump 12 meters vertical uplift/14 liters per minute 220V 50 Hz
4	36402151820C.000	Recirculation pump (with agitator) 18 mt. 20 lt/min 220V 50 Hz air cooled
5	3640225810A.000	Air cooled recirculation pump 8 meters vertical uplift/ 10 liters per minute, Ø37,5 cm
6	3640225610C.000	Water cooled recirculation pump 6 meters vertical uplift/10 liters per minute 220 V - 50 Hz
7	3640250711M.000	Python pump. 7 meters vertical uplift/ 11 liters per minute
8	3675SELT700.000	Immersion pump
	3605400RAPR.001	Procon soda recirculation pump (400 lt/h) in stainless steel
	3605400ROPR.000	Procon carbonation pump (400 lt/h) in brass
	3010CAR1325.000	Motor for carbonation pump 1/3 HP 220V 50/60Hz
	146013VNRSF.000	1.3 lt carbonator with spherical NRV
	146027RSVNS.000	2.7 lt carbonator with spherical NRV

Pneumatic pumps

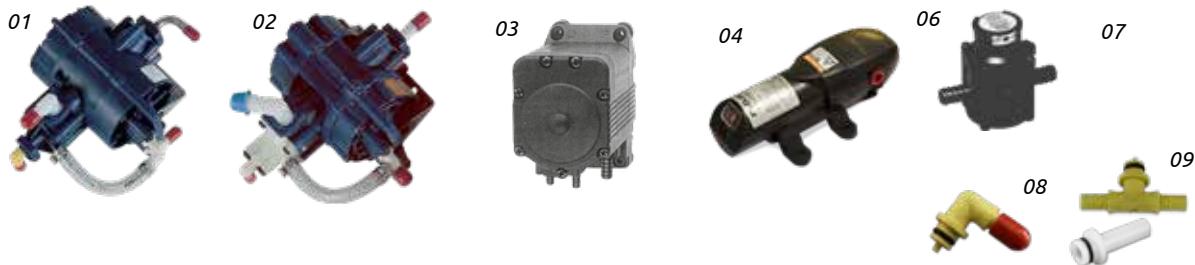

NUM	PART NO.	DESCRIPTION
1	36202254920.000	Pneumatic pump for wine, beverages and syrups
2	36202254925.000	Pneumatic pump for beer
3	3620225555.000	Pneumatic pump "5500" for wine
4	3610225PRMI.000	Electric pump with timer - Premix
5	0442FLOCO38.000	Quick fitting 3/8" for Flojet pump (2 for each pump)
		Automatic Switch
6	0424AUTOELE.000	For electric pump 1500 - 031
	0424AUTOMPN.000	For pneumatic pump 1500 - 030
		Spare parts for Shurflo pumps
7	0460141414T.000	Barb connector T-shaped 1/4" Shurflo
8	0460SHPL907.000	Elbow barb connector in plastic Ø 7 mm, for Shurflo pump
9	0460SHPLPR8.000	Plastic barb connector Ø8 mm for Shurflo pump

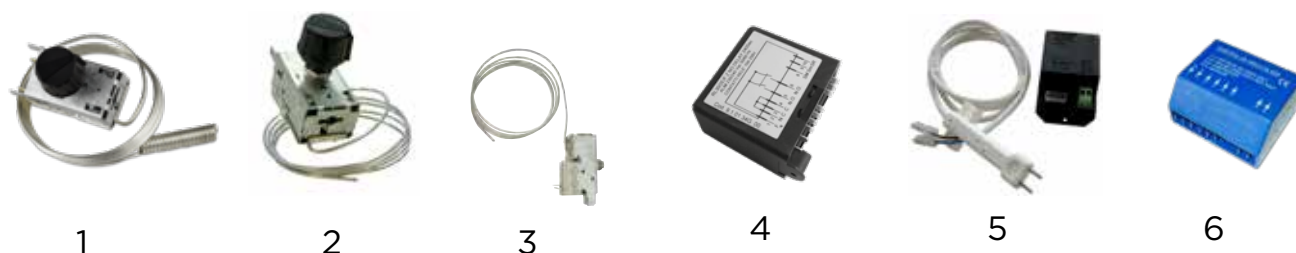

THERMOSTATS		
1	4610MEC2005.000	Mechanical thermostat 2005 with handle
2	4610MEC5045.000	Mechanical thermostat 5045 with handle
3	4610MEC5130.000	Mechanical thermostat L5130
	1030SOIC208.000	Ice bank probe IC 200 Ø 8mm
4	121525302EF.000	Electronic control unit for carbonation and carbonation pump (black box)
5	1215BGHIC20.000	Electronic control unit for ice bank IC200
6	1215REGOLGH.000	Electronic control unit for ice bank adjustment
	4605DIGZ31Y.000	Digital thermostat

Water filters



NUM	PART NO.	DESCRIPTION
1	3205EVERPUR.000	Carbon Filter with pressure reducer and Everpure 4C cartridge
2	3205POLYECR.000	Poly head with pressure reducer and tap + fittings
3	3205SRIDPRE.000	Carbon Filter without reducer with small cartridge
4	3210FILTRGR.000	4C medium replacement filter cartridge
5	3210FILTRPC.000	AC small replacement filter cartridge
6	3210FIPAR10.000	Filter cartridge PROFINE ARGENTO 10600 lt
7	3225PURIFIL.001	Purifil kit for refined water
8	0635UV4W000.000	UV Lamp 4W + Transformer
9	1430MADDA12.000	Maddalena water liter counter 1/2"
	1440FILTRDE.000	Manometer for carbon filter

Quick fittings

	PART NUMBER	TUBE	TUBE
Straight Fitting 	04423838DRR.000 04421212DRR.000 04423851DRR.000 04421238DRR.000 04421251DRR.000	3/8 1/2 3/8 1/2 1/2	3/8 1/2 5/16 3/8 5/16
Straight fitting with Superseal 	04423851DRB.000 04425151DRB.000	SUPERSEAL 5/16 5/16	3/8 5/16 ^{superseal}
Elbow fitting 	04423838CRR.000 04421212CRR.000 04425151CRR.000 04423851CRR.000 04421238CRR.000 04421251CRR.000	TUBE 3/8 1/2 5/16 3/8 1/2 1/2	3/8 1/2 5/16 5/16 3/8 5/16
Elbow fitting with Superseal 	04423851CRB.000	SUPERSEAL 5/16	3/8
Cylindrical thread with flat edge 	04423858DRD.000 04423812DRD.000 04423812REC.000 04423834DRD.000 04423838DRD.000	TUBE 3/8 3/8 3/8 3/8 3/8	THREAD 5/8 1/2 1/2 cone end 3/4 3/8
Female - end fitting 	Thread American Flare 04425114DRD.000 04421014RDD.000 Thread UNS (Coca Cola) 04423812COC.000	TUBE 5/16 3/8 3/8	THREAD 1/4FFL 1/4FFL 1/2
Elbow fitting with Counterbore 	04423838CRC.000 04425138CRC.000 04421212CRC.000 04425151CRC.000	STEM 3/8 5/16 1/2 5/16	TUBE 3/8 3/8 1/2 5/16

	PART NUMBER	TUBE	TUBE
Reducing fitting 	04425138DRC.000 04423851DRC.000	STEM 3/8 5/16	5/16 3/8
Tee fitting 	04423838TRR.000	TUBE 3/8	TUBE 3/8
Straight end fitting 	Conical thread 04423838DRF.000 04423814DRF.000 NPTF 04423812DRF.000	TUBE 3/8 3/8 3/8	THREAD 3/8 1/4 1/2
Locking clip 	049406PINZA.000 049408PINZA.000 049410PINZA.000 049412PINZA.000	6 mm 8 mm 10 mm 12 mm	
Y fitting 	04423838YRR.000	3/8	
Tube to Hose 	0448R12T12A.000 0448R38T38A.000 0448R38T516.000	STEM 1/2 3/8 3/8	HOSE 1/2 3/8 5/16
U Bend fitting 	04201212180.000 Plastic 180°	TUBE 1/2	TUBE 1/2
Premix bargun thread M7/16 Premix bargun thread M7/16 For tap 	04423814DRM.000 04423814CRB.000 1805RUBJG38.000	3/8 3/8 3/8	1/4 1/4 3/8
Conversion table mm to Inch			
3 mm - 1/8"	7.9 mm - 5/16"	15.9 mm - 5/8"	
4.8 mm - 3/16"	9.5 mm - 3/8"	19.4 mm - 3/4"	
6.4 mm - 1/4"	12.7 mm - 1/2"	25.4 mm - 1"	

Python lines

Insulation



NUM.	PART NUMBER	DESCRIPTION
	20300202PRO.000	Python 2 products (3/8") + 2 recirculation lines (1/2")
	20300302PRO.000	Python 3 products (3/8") + 2 recirculation lines (1/2")
	20300402PRO.000	Python 4 products (3/8") + 2 recirculation lines (1/2")
1	20300502PRO.000	Python 5 products (3/8") + 2 recirculation lines (1/2")
2	20300602PRO.000	Python 6 products (3/8") + 2 recirculation lines (1/2")
3	20300802PRO.000	8 products (3/8") + 2 recirculation lines (1/2")
4	20300802H2O.000	Python 8 products (3/8") + 2 recirculation lines (1/2") + cable
	2030102H2OC.000	Python 10 products (3/8") + 2 recirculation lines (1/2") + cable
5	2030104H2OC.000	Python 10 products (3/8") + 4 recirculation lines (1/2") + cable
6	20100606GOM.000	Rubber insulation tubing 6x6
7	20100806GOM.000	Rubber insulation tubing 8x6
8	20201016RIC.000	Thermoplastic food grade tubing 10x16 mm. for recirculation, PVC
9	20101810ISO.000	Insulation 18X10 Polisolan
10	20102210POL.000	Insulation 22x10 Polisolan
11	0145000MT10.000	Roll of thermic tape for python, 10 meters
12	0135NER1925.000	Roll of sticky tape for python 19 mm height
13	0135PITONEO.000	Roll of sticky tape for python, 50 mm height

Other dimensions and configurations are available upon request
 Python lines available in rolls of 50 mt.



1 to 5



6 to 14



16 to 19



20 to 22



23 to 25



26



27, 28



29

NUM.	PART NO.	DESCRIPTION
1	0460L67918C.000	Shank 90° Lupulus II 6,7x9,5 mm length 1.8 mt. shank 5/8
2	0460LUP6795.300	Shank 90° Lupulus II 6,7x9,5 mm length 3 mt. shank 5/8
3	0460L54818C.000	Shank 90° Lupulus II 5,4x8 mm length 18 cm. shank 5/8
4	0460L54830C.000	Shank 90° Lupulus II 5,4x8 mm length 30 cm shank 5/8
5	0460LUP6795.000	Shank 90° Lupulus II 6,7x9,5 mm length 80 cm. shank 5/8
6	2020LU36795.000	LUPULUS III 6,7X9,5 mm 100mt
7	2020PLK6795.000	POLY SK d 6,7X9,5 mm 100 mt ref L04491
8	2020LU34508.000	LUPULUS III-P SK d 4,5X8 mm 100 mt ref L04502
9	2020LU35595.000	LUPULUS III-P SK d 5,5X9,5 mm 100 mt ref L04503
10	2020LU30408.000	LUPULUS III-P SK d 4X8 mm 100 mt ref L04504
11	2020LU30508.000	LUPULUS III-P SK d 5X8 mm 100 mt ref L04505
12	2020LU30695.000	LUPULUS III-P SK d 6X9,5 mm 100 mt ref L04506
13	2020SGE7127.000	SG EVA SK d 7X12,7 mm 100 mt ref L04507
14	2020PLK9512.000	POLY SK d 9,5X12,7 mm 100 mt ref L04510
15	202055095TF.000	FLEXLAYER III SK d 5,5X9,5 mm 100m GREY 2R ref L04512
16	20200812RIC.000	Thermic food grade tubing 8x12 mm for water recirculation
17	20200912RIC.000	Thermoplastic food grade tubing 9x12 mm. for recirculation, PVC
18	20201014RIC.000	Thermoplastic food grade tubing 10x14 mm. for recirculation, PVC
19	20201016RIC.000	Thermoplastic food grade tubing 10x16 mm. for recirculation, PVC
20	20400805ACC.000	Stainless steel AISI 304 tubing 8 mm x 0,5 mm.
21	204008316AC.000	Stainless steel AISI 316L 8x0,5 mm
22	20401005ACC.000	Stainless steel 10x0,5 mm
		100 meters roll
23	20200408CRY.000	Food grade hose 4x8 mm vinyl
24	20200609CRY.000	Food grade hose 6x9 mm vinyl
25	202068126CR.000	Food grade hose 6,8x12,6 mm vinyl
26	202068136DO.000	Food grade tubing 6,8x13,6 mm. double reinforced, vinyl
27	20700038RIG.000	Food grade tubing, colour white, 3/8" in polyethylene
28	20701238RIG.000	Food grade tubing, colour white, 1/2" outside diameter, 3/8" inside diameter, in polyethylene
29	2020POL6795.000	Food grade tubing red 3/8

Pre-Mix and Post-Mix Barguns



QUICK FITTING AND KIT FOR BARGUNS		
	PART NO.	DESCRIPTION
	0464716716P.000	Push-in connector 7/16" - 7/16" Delrin
	0448071670A.000	Nipple 7/16" 07 AISI 303
	0422716CROM.000	Nickel plated nut 7/16"
	04423814DRM.000	Quick fitting 3/8 "Shank 1/4" MFL (7/16)
		(6 pcs. for each bargun)
1	1610KITPOST.000	Kit for Post-mix bar gun holders
	INCLUDING:	
	0850PORPIST.000	Bar gun holder support in plastic
	20200812RIC.000	Thermic food grade tubing 8x12 mm for water recirculation
	1610PISTOLA.000	Bar gun holder

2	1610KITPREM.000	Kit for Pre-mix bar gun holders
	INCLUDING:	
	0850PRPSPRE.000	Bar gun holder support in plastic
	20200812RIC.000	Thermic food grade tubing 8x12 mm for water recirculation
	1610PREXXX.000	Pre-mix bar gun holders

Pre-Mix and Post-Mix Barguns



The Schroeder America Bar Gun dispenses Post-mix, Pre-mix and Juice products and comes in both flow control and mechanical versions. Tailor your Bar Gun handle through colour and plate configuration.



CREATE YOUR BAR GUN!

- 1 Part number: 1605
- 2 Total number of buttons? Choose from 4 to 14
- 3 How many of these are Carbonated
Non Carbonated
Pre-mix?
- 4 Flow control or Mechanical version?
- 5 Done! Share with us the selected configuration to receive your quotation.

Clamps and connectors



da 1 a 5



6



da 7 a 14



da 15 a 18



19

20



21

NUM	PART NO.	DESCRIPTION
1	0432OR0709A.000	Stainless steel clamp 7-9 mm. single ear
2	0432OR1011A .000	Stainless steel clamp 10-11 mm. single ear
3	0432OR1213Z.000	Zinc plated clamp 12-13 mm. single ear
4	0432OR1213A.000	Stainless steel clamp 12-13 mm. single ear
5	0432OR1315A.000	Stainless steel clamp 13-15 mm. single ear
6	0432OR9112Z.000	Zinc plated clamp 9-11 mm. double ear
7	0432AN0870A.000	Stepless stainless steel clamp 8.7 mm.
8	0432AN0810A.000	Stepless stainless steel clamp 8.8 - 10.5 mm.
9	0432ANTI109.000	Stepless stainless steel clamp 10,9 mm.
10	0432ANT0911.000	Stepless stainless steel clamp 9.6-11.3 mm.
11	0432AN1013A.000	Stepless stainless steel clamp 10.8-13.3 mm
12	0432AN1113A.000	Stepless stainless steel clamp 11.3-13.8 mm.
13	0432AN1215A.000	Stepless stainless steel clamp 12.8-15.3 mm.
14	0432AN1417A.000	Stepless stainless steel clamp 14.5-17 mm.
15	0432VIT0510.000	Screw clamp 5-10 mm.
16	0432VIT0714.000	Screw clamp 7-14 mm.
17	0432VIT1012.000	Screw clamp 10-12 mm - Ø12 mm.
18	0432VIT1017.000	Screw clamp 10-17 mm.
19	0464GIUNTUB.000	Push-in connector for connection to elbow stainless steel tube
20	1030CORTA41.000	Short probe for carbonator
21	1030LUNGA42.000	Long probe for carbonator
22	044218JOLLG.000	QCD/Jolly head for gas for 18 liter keg
23	044218JOLL.000	QCD/Jolly head for gas for 18 liter keg
24	0442COCAGAS.000	Coca-Cola head for gas
25	0442COCAPRO.000	Coca-Cola head for product
26	0464716716P.000	Push-in connector 7/16" - 7/16" Delrin
27	0464716716A.000	Push-in connector 7/16" - 7/16" Stainless steel
28	046438716CA.000	Push-in connector for carbonation pump 7/16"
29	0464CA08DIA.000	Push-in connector for carbonation pump Ø8 mm.
30	0464CA06DIA.000	Push-in connector for carbonation pump Ø6 mm.
31	04641414RSB.000	Push-in connector 1/4"M - 1/4"M
32	043608BIRAC.000	Straight push in connector for junction Ø8 mm.
33	04601014CPA.000	Barb connector for wine pump
34	1480NRPO716.000	Non-return valve 7/16"
35	1480NRPOM14.000	Non-return valve for carbonation pump

22



23



24 - 25



27



29



31



32



34



FOBs

Post-mix valves



1810EL

All main post-mix valve types available:
electronic Sanitary lever, Push to pour
and Portion control



1815

Mounting Blocks for
Lancer, UF1 and Flomatic
post-mix valves



1



2



3



4



5




6



7

FOB		
NUM	PART NO.	DESCRIPTION
1	5215VFFMACC.000	Stainless steel FOB detector for Keg
2	5215VFOBX98.000	FOB detector shut-off valve with wall mounting
POST-MIX VALVES		
3	1825FLOLESO.000	Soda lever for Flomatic post-mix valve
4	1825FLMANUT.000	Complete kit for maintenance
5	0610ALIMENT.000	Electric wire for valve
6	2840RUBFLOM.000	Brush for Flomatic valve
7	8500RIFMDIG.000	Refractometer

Accessories for pressure reducers

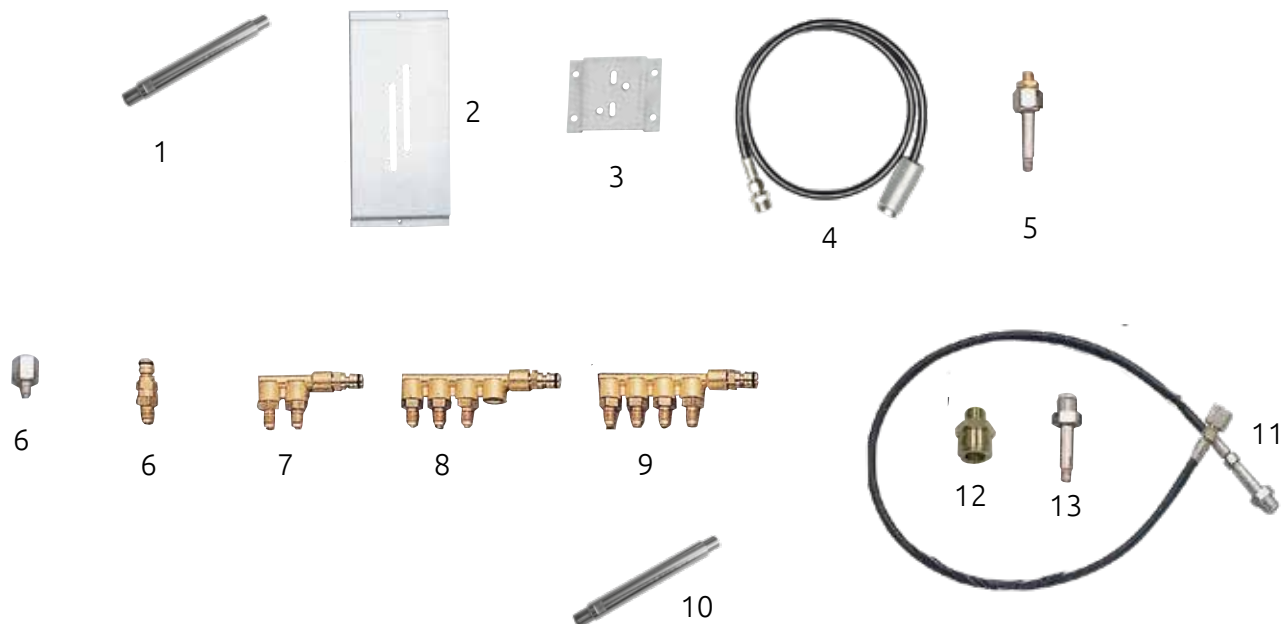

num.	PART NO.	DESCRIPTION
1	8500RMCLRID.002	Connection pipe for pressure reducer
2	4840RIDUTTO.000	Wall mount panel in galvanized sheet iron for pressure reducer
3	4840RID8065.000	Metal plate to fix pressure reducer on wall
4	2075CO2MAOR.000	High pressure hose
5	1415ATTBON2.000	Nitrogen cylinder barb fitting with nuts
6	1420VALVOL1.000	1-way manifold with non-return valve
7	1420VALVOL2.000	2-ways manifold with non-return valve
8	1420VALVOL3.000	3-ways manifold with non-return valve
9	1420VALVOL4.000	4-ways manifold with non-return valve
10	8500RMCLRID.002	Connection pipe for pressure reducer
11	2075N2HPRES.000	Nitrogen high pressure hose, 1.2 meter
12	0404CO2HPRE.000	Pressure reducer adapter for CO2 high pressure hose
13	0404N2HPRES.000	Pressure reducer adapter for nitrogen high pressure hose
	1445RIDUTTZ.000	Wall mount Z-shaped plate in galvanized sheet iron for pressure reducer
	1455KITMRID.000	Spare parts kit for pressure reducers
	04880505TSB.000	Fixing screw (2 for each plate)
	144006BARBP.000	Manometer low pressure, 6 Bar
	144010BARBP.000	Manometer low pressure, 10 Bar
	144025CO2HP.000	CO2 high pressure manometer, 0-160 Bar
	144031N2HPR.000	Nitrogen high pressure manometer, 0-315 Bar



145512CO2NW.TPR

CO2 pressure regulator, 1 body, 2 manometers
Outlet: 1/4" Flare (6 bar + high pressure)



145523CO2NW.TPR

CO2 pressure regulator, 2 bodies, 3 manometers
Outlet: 1/4" Flare (10 bar + 6 bar + high pressure)



145534CO2NW.TPR


CO2 pressure regulator, 3 bodies, 4 manometers
Outlet: 1/4" Flare
(10 bar + 10 bar + 6 bar + high pressure)



1455010150P.DJG

CO2 secondary pressure regulator (3.5 bar) with 3/8" quick fittings and st. steel mounting bracket

Gaskets



NUM	PART NO.	DESCRIPTION
1	0454COPFUST.000	Gasket for 18 liter keg lid
2	0440TUBOHPR.000	Soft gasket for high pressure tube and pressure reducer
3	0440ESTINTT.000	Inside-outsdie gasket for dispensing head Flat and Grundy type
	0440ESTASTB.000	Gasket for dispensing spear
4	0440ESTTESB.000	Outside gasket for dispensing head Sankey type
5	0454526TEST.000	O-ring for dispensing head Sankey type
6	0440INTTESB.000	Inside gasket for dispensing head Sankey type
	0440TENPTFE.000	Seal gasket PTFE
	0454113FUST.000	O-ring 113 for valve 18 liters keg
	04542037POS.000	O-ring 2037 for post-mix barb connector
	0440PVC2062.000	PVC transparent gasket
	044011RACCN.000	Black gasket for post-mix connector Ø 11mm.
	044007RACCO.000	White gasket for postmix connector Ø 7 mm. 5/8"
7	0440PVCMORB.000	Soft PVC gasket
	0440NYLONRI.000	Nylon gasket for pressure reducer
	0440COLLOCI.000	"Swan neck" gasket
	0440201306P.000	PVC gasket for counterbore
8	0440TRONCOC.000	7/16" conical gasket
	4541123050.000	O-ring 3050 for Coca-Cola valve
	4541062000.000	Shank O-ring
9	04544036THP.000	O-ring 2.204 for high pressure tube with handle
	0454ESTERNO.000	Outside O-ring for dispensing head flat type
10	0480BOMRUBP.000	Front convex washer for tap
	0480RLEVP20.000	Plastic washer 20 mm. for tap
	0480RUBIPOS.000	Back convex washer for tap
	0484SERPGOM.000	Rubber cap for coils
11	045208TEFLO.000	Teflon countersunk washer Ø 8 mm.
	045206TEFLO.000	Teflon countersunk washer Ø 6 mm.
	045210TEFLO.000	Teflon countersunk washer Ø 10 mm.
12	1480TORPEDO.000	Torpedo non return valve for product
13	1480NRTSGAS.000	Valvola non ritorno per testa spillaggio gas

11




12



13



Barb connectors




NUM	PART NO.	DESCRIPTION
1	0460141414T.000	Barb connector T-shaped 1/4" Shurflo
2	0460SHPL907.000	Elbow barb connector in plastic Ø 7 mm, for Shurflo pump
3	0460SHPLPR8.000	Plastic barb connector Ø8 mm for Shurflo pump
4	04600758DPA.000	Flat, straight barb connector Ø 7 mm. 5/8"
5	04600758DCA.000	Straight barb connector with counterbore Ø 7 mm. 5/8" nickel
6	04600758CPA.000	Flat, elbow barb connector Ø 7 mm. stainless steel
7	046007CURCC.000	Elbow barb connector with 5/8" counterbore Ø7 mm.
8	0460MII2GAS.000	Barb connector 1/2" for dispensing heads gas inlet
	0460587CUSC.000	Elbow nickel barb connector Ø7 mm. 5/8"
	046011SEMIC.000	Curve nickel plated barb connector Ø11 mm.
	046008DRICC.000	stainless steel barb connector, expanded Ø8 mm. counterbore 5/8"
	046008CURCC.000	Elbow stainless steel barb connector, expanded Ø8 mm.
	04600712DCA.000	Straight barb connector with counterbore 1/2" Ø7 mm.
	04600712DPO.000	Straight barb connector Ø7 mm. 1/2"

Nipples



NUM	PART NO.	DESCRIPTION
1	0448T040404.000	Barb Tee 4-4-4 mm. in stainless steel AISI 303
	0448T040407.000	Barb Tee 4-4-7 mm. in stainless steel AISI 303
	0448T070707.000	Barb Tee 7-7-7 mm. in stainless steel AISI 303
2	0448T101007.000	Barb Tee 10-10-7 mm. in stainless steel AISI 303
	0448T101010.000	Barb Tee 10-10-10 mm. in stainless steel AISI 303
3	0448CR7777A.000	Nipples a croce Ø7 mm. Aisi 303
4	0464SCARH20.000	Delrin fitting for water tank drain
5	0448DO0404A.000	Straight splicer 4-4 mm in stainless steel AISI 303
6	0448DO0704A.000	Straight splicer 7-4 mm. in stainless steel AISI 303
	0448DO0707A.000	Straight splicer 7-7 mm. in stainless steel AISI 303
	0448DO1007A.000	Straight splicer 7-10 mm. in stainless steel AISI 303
	0448DO1010A.000	Straight splicer 10-10 mm. in stainless steel AISI 303
	0448071644A.000	Nipple 7/16" Ø 4.4 mm. in stainless steel AISI 303
	0448COC1204.000	Nipple 1/2" Ø 4 mm f or Coca-Cola heads in stainless steel AISI 303
7	0448COC1207.000	Nipple 1/2" Ø7 mm f or Coca-Cola heads in stainless steel AISI 303
8	0448071670A.000	Nipple 7/16" Ø 7 mm f or Jolly /QCD heads in stainless steel AISI 303

Spare parts

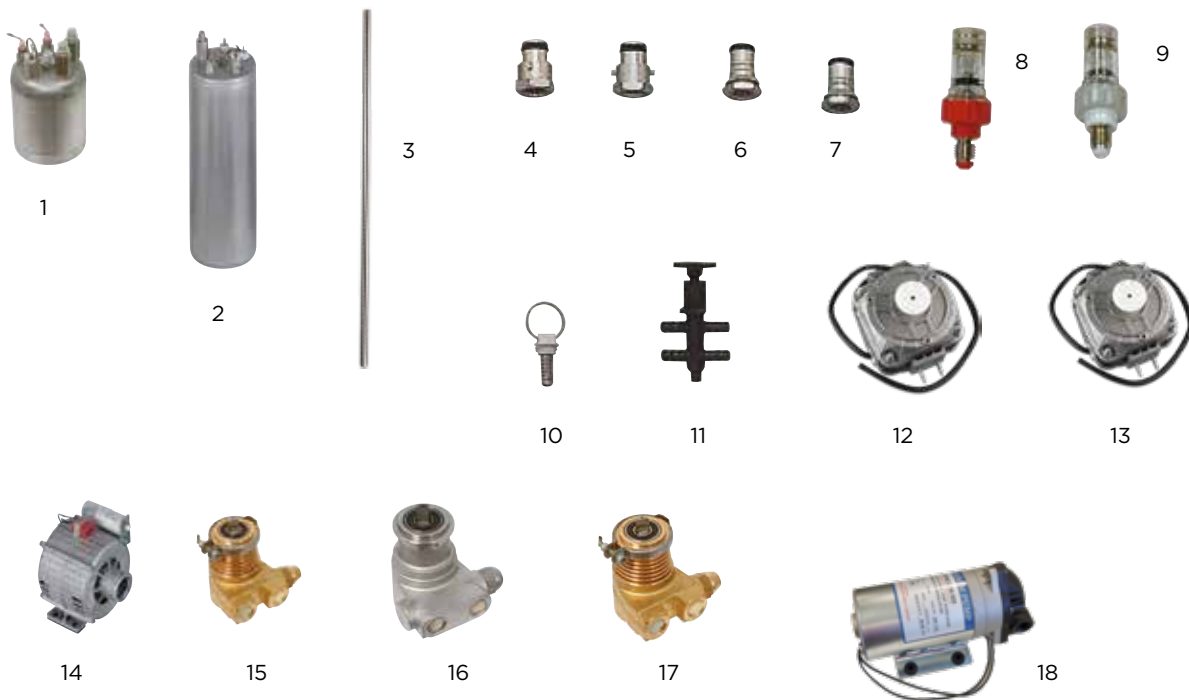

CARBONATORS		
NUM	PART NO.	DESCRIPTION
1	14600000007.000	Carbonator 0.7 liters
	14600270000.000	Carbonator 2.7 liters
2	1460027RSOD.000	Carbonator 2,7 liters for soda recirculation
3	0463450TUBO.000	Connection tubing 450 mm to fix secondary regulators on wall panel
4	1480FUSTOBI.000	Coca-Cola product valve for keg
5	1480FUSTOGA.000	Coca-Cola gas valve for keg
6	1480JOLLYBI.000	Jolly/QCD product valve for 18 liter keg
7	1480JOLLYGA.000	Jolly/QCD gas valve for 18 liter keg
8	1480NRINNCC.000	Non-return valve for Coca-Cola head
9	1480NRINNJO.000	Non-return valve for Jolly/QCD head
10	1480SFIAT18.000	Relief valve for 18 liter keg
11	1830VINOMAN.000	Mixer with handle for wine coolers
FAN MOTORS		
12	30401023456.000	Fan motor with cable 10W 220/230 V 50/60Hz (for coolers: HE 100 / 120 / 140)
13	3040523456X.000	Fan motor with cable 5W 220/230V 50/60Hz
ROTARY PUMPS		
14	3010140W225.000	Motor for soda recirculaiton 140 W
15	360520010RO.000	200 liters pump in brass f or water carbonation
16	3605400LTRA.000	400 liters pump in stainless steel for soda recirculation
17	3605400LTRO.000	400 liters pump in brass f or water carbonation
18	3605PMC2259.000	Diaphragm carbonator pump 9 ATM



TUBE BENDERS		
NUM	PART NO.	DESCRIPTION
1	850508ACCIA.000	Stainless steel tube bender 8 mm
2	850508MOLLA.000	Tube bender spring 8 mm
3	850510ACCIA.000	Stainless steel tube bender 10 mm
DRILL BITS		
4	8530MARMO30.000	Drill bit for marble Ø30 mm
5	8530MARMO35.000	Drill bit for marble Ø35 mm
6	8530MARMO40.000	Drill bit for marble Ø40 mm
	8530TAZZA22.000	Drill bit Ø22 mm no spindle
	8530TAZZA23.000	Drill bit Ø23 mm no spindle
7	8530TAZZA36.000	Drill bit Ø37 mm no spindle
	8530TAZZA40.000	Drill bit Ø40 mm no spindle
8	8530TAZZA60.000	Drill bit Ø60 mm no spindle
HOSE CUTTER		
9	8535GRANDEA.000	Large hose cutter
10	8535PICCOLA.000	Small hose cutter
	8540ALCOLIC.000	Termometer with plastic bag
	8500CERCFUG.000	Gas leak detector
11	8500REGOLPR.000	Ruler to check pressure

Spare parts

WALL ADAPTERS		
NUM.	PART NO.	DESCRIPTION
1	0404AMUROBI.000	Wall adapter for "Birac" 5/8" - 1/4"
	0404RUCRUZC.000	Adapter with chrome finish for tap 5/8M-1/2F
2	042008PITAC.000	Stainless steel U Bend for python 8 mm
	042010PITAC.000	Stainless steel U Bend for python 10 mm
DADI		
	0422106085O.000	DADO 1" FLANGIATI 60X8,5 OTTONE
3	0422121616C.000	Nickel plated nut 1/2" for Coca Cola
4	0422122412P.000	Nickel plated nut 1/2" f or barb connector
5	042212MICRO.000	Micromatic nut 1/2" for dispensing head
6	04221408OTC.000	Nickel-plated nut 1/4" Ø 8 mm in brass
7	0422582512P.000	Nickel plated nut 5/8" f or barb connector
8	042258MICTS.000	Micromatic nut 5/8" for dispensing head
9	0422716CROM.000	Nickel plated nut 7/16" for Pepsi-Cola with reducing
10	0422CIECOAC.000	Cap nut 7/16"
PINCERS		
11	0426PINZAFA.000	Clamp pincer
12	0426PINZAGR.000	Big pliers for rubber hose
13	0426PINZAPI.000	Small pliers for rubber hose
KEY FOR TAPS		
14	0450RUB2528.000	Wrench 25/28 for tap and pressure reducer
15	0450RUBWOLF.000	Wrench for Wolf tap
TRANSFORMERS		
16	12252252450.000	Transformer for electric valves 24 v 50VA 220V, Schuko plug, fixing system by screws
17	12402125WCC.001	Transformer 220V - 12V 5W with European plug for LED illumination
	1230TR100VA.002	Trasformer 220V - 24V AC 100VA with Schuko plug
	1230TR150VA.001	Trasformer 220V - 24V AC 150VA with Schuko plug



1 2



3 4



5 6



7 8



9 10



11 12



13



14



15



16



17

COUNTER WITH TOP IN STAINLESS STEEL AISI 304, PLUGGING ON THREE SIDES IN PUNCHED PLATE, LOWER LEVEL IN GALVANIZED SHEET IRON, 2 FIXED WHEELS AND 2 REVOLVING WHEELS Ø 125 mm



PART NO.	DESCRIPTION
8015FS148IR.000	Bench 1400X800x900h mm.
8015FS168IR.000	Bench 1600x800x900h mm.
8015FS198IR.000	Bench 1950x800x900h mm.
8015FS16895.000	Bench 1600x800x950 mm

- Base in stainless steel.
- Bench in stave wood.
- Stainless steel coated top in wooden.
- With wheels.
- It can be used for all type of undercounter refrigeration.
- The counter was realized to contain:
CO2 cylinder, - kegs 20, 30, 50 liters
undercounter refrigerator
- Sturdy casing to be used also on the open air.
Ideal for beer parties, rallies and festivals requiring large
venues. It can be completely dismantled.

Wooden Counter



8015KEGINRE.000

Bench to contain 1 or 2 kegs +CO2 cylinder.
Dimensions cm 105 x 70x 108 height

8015KEG2NRE.000

Bench to contain 2 or 3 kegs +CO2 cylinder.
Dimensions cm 140 x 70x 108 height

Pressure and saturation charts

CO2 SATURATION LEVEL OF DIFFERENT STYLES OF BEER AND OTHER BEVERAGES

ENGLISH ALES	-2,0—2,5 gr/l.
FRENCH PILS	-4,0—4,5 gr/l.
CZECH PILS	-4,6 gr/l
GERMAN PILS	-4,6 gr/l
BELGIAN PILS	-4,8—5,0 gr/l
WEIZEN	-6,0—7,5 gr/l
COCA-COLA	-7,5 gr/l
CHAMPAGNE	-16 gr/l
MORETTI	-4,6 gr/l

CORRELATION BETWEEN TEMPERATURE AND SATURATION TIME

TEMPERATURE	OVERSATURATION TIME	
	HOURS	DAYS
0°	2 – 4	
5°	4 – 12	
10°	12 – 36	
15°	36 – 56	2,33
20°	56 – 72	3
25°	72 – 88	3.66
30°	88 – 104	4,33
35°	104 – 120	45

HOW TO DETERMINE THE IDEAL PRESSURE FOR YOUR DRAFT BEER SYSTEM

In order to calculate the ideal pressure you have to add 0.100 kg/cm² to the values below for each meter of beer line between the keg and the tap (horizontal distance and vertical rise/fall).

CO2 saturation (gr)	TEMPERATURE																		
	0	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36
4,3	0,35	0,50	0,60	0,70	0,85	0,95	1,05	1,20	1,35	1,50	1,65	1,80	1,95	2,10	2,25	2,40	2,55	2,70	2,85
4,5	0,45	0,55	0,65	0,80	0,90	1,05	1,15	1,30	1,45	1,60	1,80	1,95	2,10	2,25	2,40	2,55	2,70	2,85	3,00
4,7	0,50	0,65	0,75	0,90	1,00	1,15	1,25	1,40	1,60	1,75	1,90	2,10	2,25	2,40	2,55	2,70	2,85	3,00	3,15
4,9	0,60	0,70	0,85	0,95	1,10	1,25	1,35	1,55	1,70	1,85	2,05	2,20	2,40	2,60	2,80	3,00	3,20	3,40	3,60
5,1	0,65	0,80	0,90	1,00	1,20	1,35	1,50	1,65	1,80	2,00	2,10	2,35	2,55	2,70	2,90	3,10	3,30	3,50	3,70
5,3	0,7	0,85	0,95	1,10	1,25	1,40	1,55	1,75	1,95	2,15	2,30	2,5	2,75	3,00	3,25	3,50	3,75	4,00	4,25
5,5	0,75	0,95	1,05	1,20	1,35	1,50	1,65	1,85	2,05	2,25	2,40	2,65	2,90	3,15	3,40	3,65	3,90	4,15	4,40
5,7	0,85	1,00	1,10	1,30	1,45	1,60	1,85	1,95	2,15	2,35	2,55	2,75	2,95	3,25	3,50	3,75	4,00	4,25	4,50
5,9	0,9	1,05	1,15	1,45	1,50	1,65	1,95	2,05	2,25	2,45	2,65	2,80	3,05	3,30	3,55	3,80	4,05	4,30	4,55
6,1	0,95	1,10	1,20	1,50	1,55	1,70	2,00	2,10	2,30	2,50	2,70	2,85	3,10	3,35	3,60	3,85	4,10	4,35	4,60
6,3	1,05	1,15	1,25	1,55	1,60	1,75	2,05	2,15	2,35	2,55	2,75	2,90	3,15	3,40	3,65	3,90	4,15	4,40	4,65
6,5	1,10	1,20	1,30	1,60	1,65	1,80	2,10	2,20	2,40	2,60	2,80	2,95	3,20	3,45	3,70	3,95	4,20	4,45	4,70
6,7	1,15	1,25	1,35	1,65	1,70	1,85	2,15	2,25	2,45	2,65	2,85	3,00	3,25	3,50	3,75	4,00	4,25	4,50	4,75
6,9	1,20	1,30	1,40	1,70	1,75	1,90	2,20	2,30	2,50	2,70	2,90	3,05	3,30	3,55	3,80	4,05	4,30	4,55	4,80

SYMPTOM



Vin Service S.r.l.

Via G. Falcone 26/34
24050 Zanica (Bergamo) - Italy

Phone: +39 035 672 361

info@vinservice.it / www.vinservice.com